

INSP IRED BYLI GHT

Technolite
Lighting Catalog 2019

**WE DESIGN, CREATE
AND IMPROVE**
LIGHTING PRODUCTS
TO INSPIRE BETTER
LIT SPACES AND NEW
POSSIBILITIES

Who We Are

As a second-generation lighting company, Technolite is a personal journey for us. Light gets us charged about what we do and fuels our passion. We realized long ago that how our products make people feel, is just as important as the products we make.

For our clients, it means finding a partner that is excited about every product and every project that is embarked upon together. Our skills, passion and pride are represented in every product and process in our company.


We created Technolite to be different than other lighting brands. We built our company to stand out, designing products with a philosophy of innovation, attention to details, and exceptional value. We start from the top and perfect even the smallest of details right through the ease of installation and packaging choices.

The lighting world is full of mediocre “me too” brands. It’s hard to find a brand that shares your passion and understands the importance of designing functional products that will blend seamlessly into every day surroundings. If you recognize the importance of appealing design and high-quality products, and search for a brand that delivers excellent performance with the precision you expect, Technolite is the ideal choice for you.

We look forward to working together with you.


Jeremy Hauser

CEO



Development & Design

Our development process is rooted in the idea that our finished products must exceed our clients demands. Our inspiration comes from everywhere both within and without the lighting industry. We begin our designs with a simple sketch and use a combination of development techniques and technologies en route to a perfect product that we are proud to introduce to you.

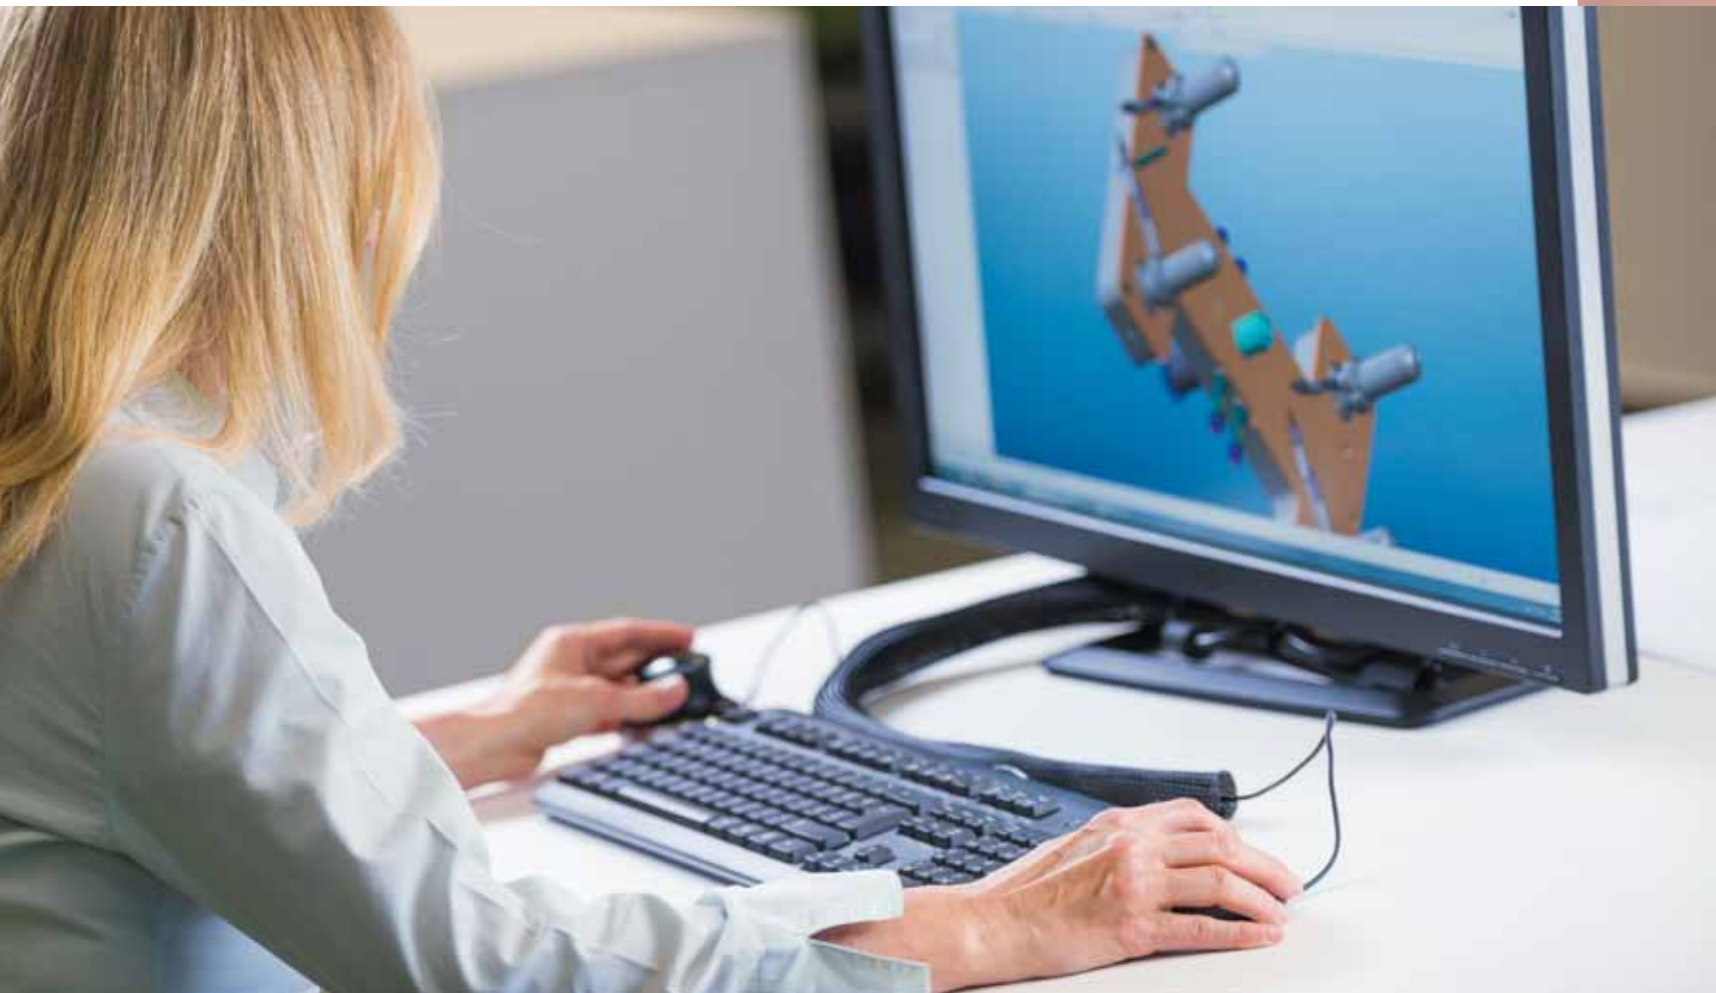

Technology

The integration of LED technology into lighting applications has created a new paradigm of lighting design. We constantly integrate the newest technologies into our products and design our products to benefit from the latest advancements. As we design our products, we make sure to keep in mind the true total cost of the product for our customers, and think about installation, lighting control, maintenance, power usage and replacement costs in addition to the cost of our product.



QC Driven Manufacturing

The manufacturing process is a clear extension of our quality control department. Each component is tested rigorously to meet the highest standards. When the assembly of a product is completed, we make sure that our products don't have a weakest link. We have a great warranty program, but we make sure you don't have to use it.



Our Partners

We have expanded our network of clients to include countries on six continents. While we see many overlaps in the needs and requests from our clients, we also know that each client is different. Our team perfectly tailors our approach and services to each of our clients throughout the world. Come challenge us to meet your needs.



Online catalog

Our online website provides access to all our products specifications and details. easily stay up to date with our new products and updates.




Service

We are here to answer any and all questions and inquiries about our products and their applications. All of our data and knowledge is available for you.



2D/3D/Photometrics

We make all our 2D, 3D and photometrics available to you on our website to make planning your projects even easier.

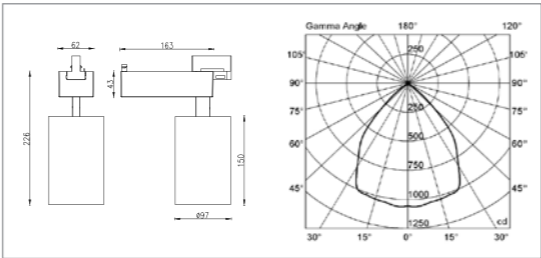

Sales

Our sales department is your window into our world. We are here to find you just the right product and coordinate your needs within our team.



Global partners

As a global lighting company, we build long-term relationships with our local partners and tailor our approach and service to each partners needs.



Logistics

We understand that every order is urgent for you. We don't believe in missing deadlines. Our job is to make your job easy.



ZEN

As a single light source with a full system of accessories Zen is the perfect fit for a wide range of applications. Zen can be fitted for recessed, surface or pendant installations. With its backlit LED technology paired with a polycarbonate diffuser ensures perfect uniformity of light while maintaining a high lumen to watt ratio. Zen suits a wide variety of applications enabling you to plan and calculate the lighting needs of your project, all from a single photometric file. The spin and lock installation method allows quick and tool free connection of the lamp body to the base. The entire Zen system maintains a screwless design for a clean look across all installation variations.


Patent pending





One light Endless possibilities

*As a single light source with a full system of accessories.
Zen is the perfect fit for a wide range of applications.*

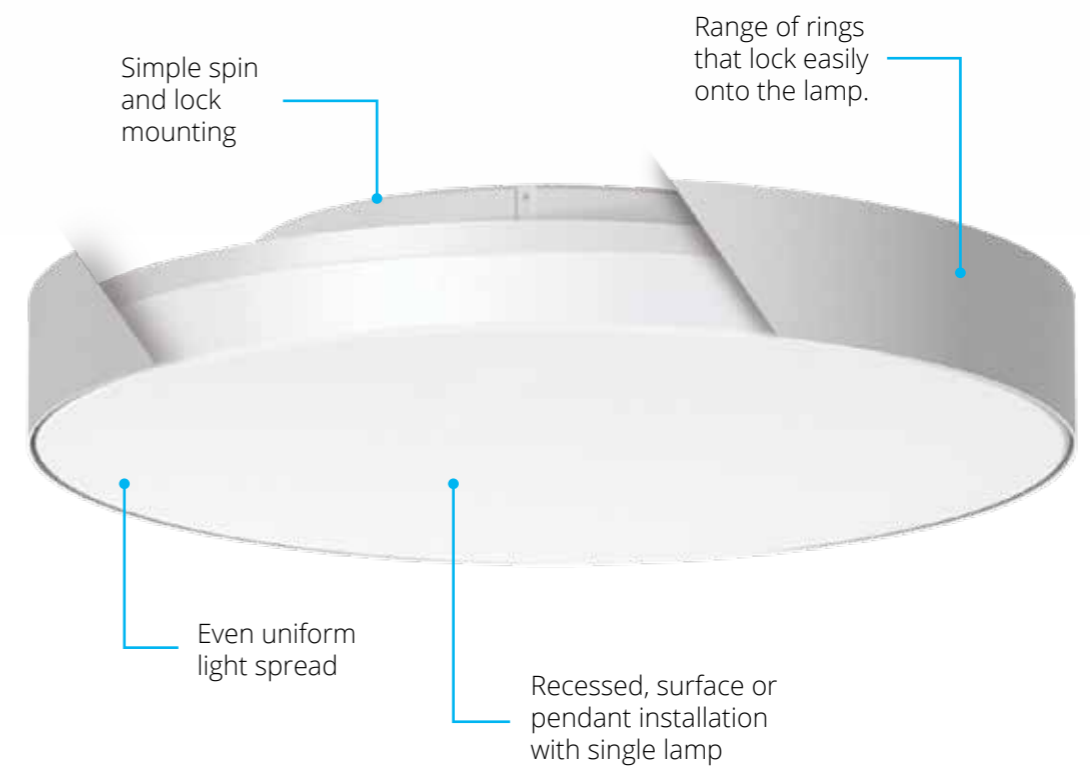



ZEN40 - Surface Ring




Technical: 32W LED | 4160Lm (Light source) 3200 (Luminaire) | CRI 80 | 2700K-6000K | Included Control Gear | 100-240V | IP20

Material: Aluminium+PC

Color: White | Grey | Black

Approvals: CB | ETL | RoHS

Accessories: Recessed kit | Pendant rod | Pendant Wires | Rings



ZEN60 - Surface Ring




Technical: 50W LED | 6500Lm (Light source) 5000 (Luminaire) | CRI 80 | 2700K-6000K | Included Control Gear | 100-240V | IP20

Material: Aluminium+PC

Color: White | Grey | Black

Accessories: Recessed kit | Pendant rod | Pendant Wires | Rings





ZEN40 - Pendant Ring




Technical: 32W LED | 4160Lm (Light source) 3200 (Luminaire) | CRI 80 | 2700K-6000K | Included Control Gear | 100-240V | IP20

Material: Aluminium+PC

Color: White | Grey | Black

Approvals: CB | ETL | RoHS

Accessories: Recessed kit | Pendant rod | Pendant Wires | Rings

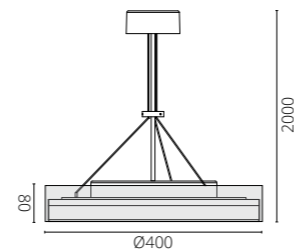

ZEN60 - Pendant Ring




Technical: 50W LED | 6500Lm (Light source) 5000 (Luminaire) | CRI 80 | 2700K-6000K | Included Control Gear | 100-240V | IP20

Material: Aluminium+PC

Color: White | Grey | Black

Accessories: Recessed kit | Pendant rod | Pendant Wires | Rings

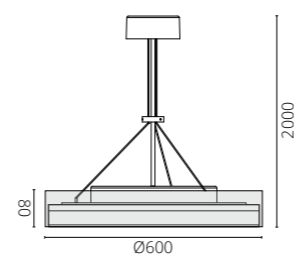

ZEN40 - Recessed




Technical: 32W LED | 4160Lm (Light source) 3200 (Luminaire) | CRI 80 | 2700K-6000K | Included Control Gear | 100-240V | IP20

Material: Aluminium+PC

Color: White | Grey | Black

Approvals: CB | ETL | RoHS

Accessories: Recessed kit | Pendant rod | Pendant Wires | Rings

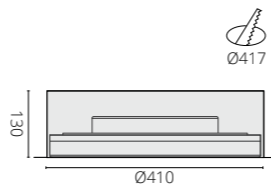

ZEN60 - Recessed




Technical: 50W LED | 6500Lm (Light source) 5000 (Luminaire) | CRI 80 | 2700K-6000K | Included Control Gear | 100-240V | IP20

Material: Aluminium+PC

Color: White | Grey | Black

Accessories: Recessed kit | Pendant rod | Pendant Wires | Rings

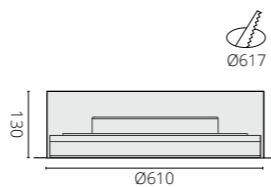



CAPRI45




Technical: 32W LED | 4160Lm (Light source) 3200 (Luminaire) | CRI 80 | 3000K, 4000, 6000K | Included Control Gear | 100-240V | IP20

Material: Aluminium+PC

Color: White | Black | White+Brass | Black+Brass

Approvals: CE | CB

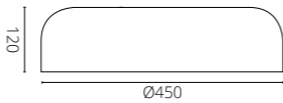

ALBA45




Technical: 32W LED | 4160Lm (Light source) 3200 (Luminaire) | CRI 80 | 3000K, 4000, 6000K | Included Control Gear | 100-240V | IP20

Material: Aluminium+PC

Color: White | Black | Black + Brass | White + Brass

Approvals: CE | CB

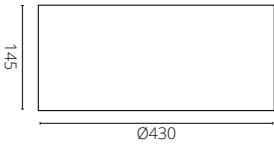



KARO45




Technical: 32W LED | 4160Lm (Light source) 3200 (Luminaire) | CRI 80 | 3000K, 4000, 6000K | Included Control Gear | 100-240V | IP20

Material: Fabric

Color: White | Grey | Charcoal | Charcoal + Brass

Approvals: CE | CB

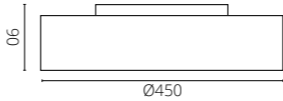

KATIA65




Technical: 32W LED | 4160Lm (Light source) 3200 (Luminaire) | CRI 80 | 3000K, 4000, 6000K | Included Control Gear | 100-240V | IP20

Material: Fabric

Color: White | Grey | Charcoal | Charcoal + Brass

Approvals: CE | CB

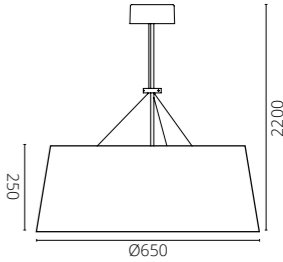

KOMODO150




Technical: 32W LED | 4160Lm (Light source) 3200 (Luminaire) | CRI 80 | 3000K, 4000, 6000K | Included Control Gear | 100-240V | IP20

Material: Rattan

Color: White | Black | Orange | Yellow

Approvals: CE | CB



KOMODO250




Technical: 32W LED | 4160Lm (Light source) 3200 (Luminaire) | CRI 80 | 3000K, 4000, 6000K | Included Control Gear | 100-240V | IP20

Material: Rattan

Color: White | Black | Orange | Yellow

Approvals: CE | CB

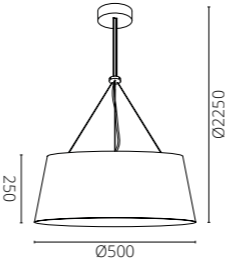

KOMODO400




Technical: 32W LED | 4160Lm (Light source) 3200 (Luminaire) | CRI 80 | 3000K, 4000, 6000K | Included Control Gear | 100-240V | IP20

Material: Rattan

Color: White | Black | Orange | Yellow


Approvals: CE | CB

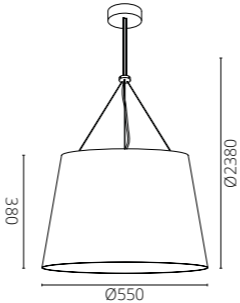



PROFILITE

The Profilite series was designed to allow you to offer a full custom linear solution without the hassle of manufacturing. Precision is important to us so we created the Profilite to give perfect end to end light in all of the variations. Thanks to the integration of linear LED's, Profilite has exceptionally high efficiency and constant light color with a uniform and impressive appearance. The use of a multi layer system allows for a full system solution with minimum stocking requirements. Profilite is the only linear system you will need for all of your projects from now on.

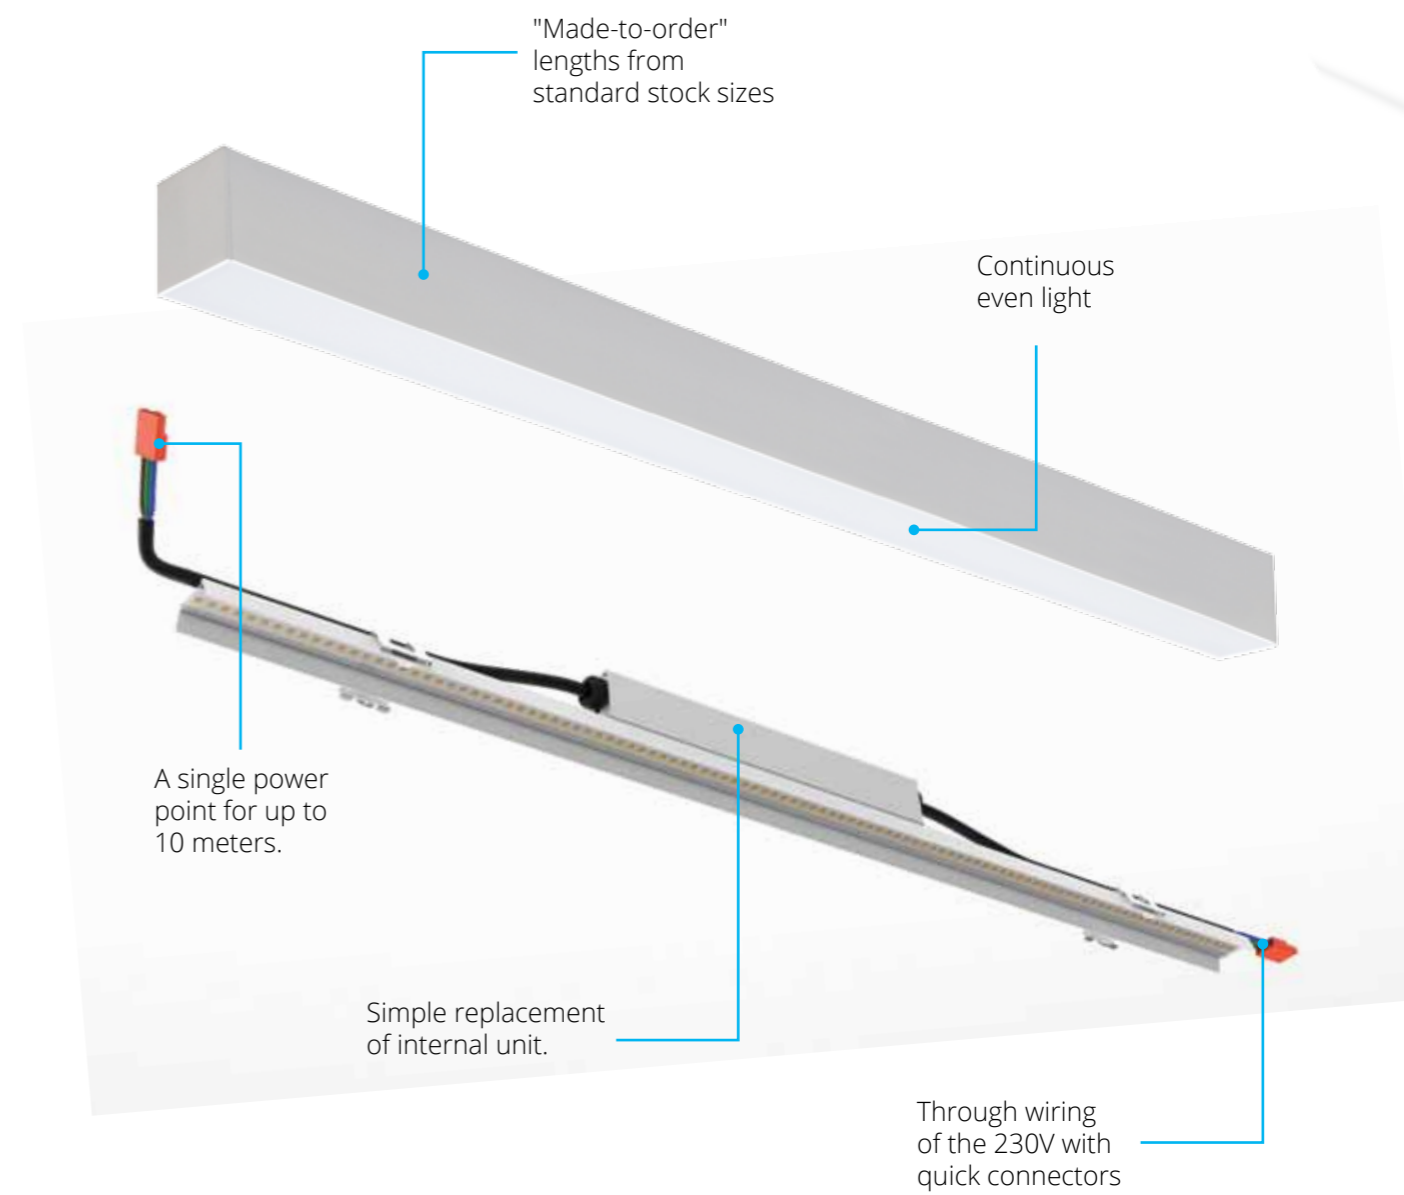



PROFILITER50 Recessed



Technical: 33W OSRAM | 3000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 880mm

Material: Aluminium + PC

Options: DALI | 0-10V | TRI-K

Color: White | Grey | Black

Approvals: CB | ETL | RoHS

Technical: 45W LED OSRAM | 4000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 1160mm



Technical: 56W LED OSRAM | 5000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 1440mm

Technical: 66W LED OSRAM | 6000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 1720mm

Technical: 78W LED OSRAM | 7000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 2000mm

PROFILITES50 Surface



Technical: 33W OSRAM | 3000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 880mm

Material: Aluminium + PC


Options: DALI | 0-10V | TRI-K

Color: White | Grey | Black

Approvals: CB | ETL | RoHS

Technical: 45W LED OSRAM | 4000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 1160mm



Technical: 56W LED OSRAM | 5000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 1440mm

Technical: 66W LED OSRAM | 6000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 1720mm

Technical: 78W LED OSRAM | 7000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 2000mm

PROFILITEP50 Pendant



Technical: 33W OSRAM | 3000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 880mm

Material: Aluminium + PC


Options: DALI | 0-10V | TRI-K

Color: White | Grey | Black

Approvals: CB | ETL | RoHS

Technical: 45W LED OSRAM | 4000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 1160mm

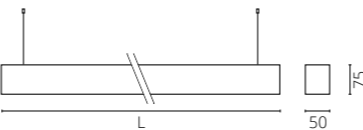

Technical: 56W LED OSRAM | 5000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 1440mm

Technical: 66W LED OSRAM | 6000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 1720mm

Technical: 78W LED OSRAM | 7000Lm | CRI 80 | 3000K, 4000K |Included Control Gear | 110-240V | IP20

Length: 2000mm

TANGO

Tango is our indoor surface mount and pendant can series. We started with the simplest of installation methods and stuck to the basics: Simple wiring, sleek design, no visible screws. Tango comes in multiple heights. We completed the series by also adding in a pendant version. We love seeing this lamp installed in projects, you will too.



TANGO15



Technical: 50W Par16 GU10 | 110-240V | IP20

Material: Aluminium

Color: White | Grey | Black | Brass



TANGO30



Technical: 50W Par16 GU10 | 110-240V | IP20

Material: Aluminium

Color: White | Grey | Black | Brass




TANGO45



Technical: 50W Par16 GU10 | 110-240V | IP20

Material: Aluminium

Color: White | Grey | Black | Brass





TANGOP140



Technical: 50W Par16 GU10 | 110-240V | IP20

Material: Aluminium


Color: White | Grey | Black | Brass

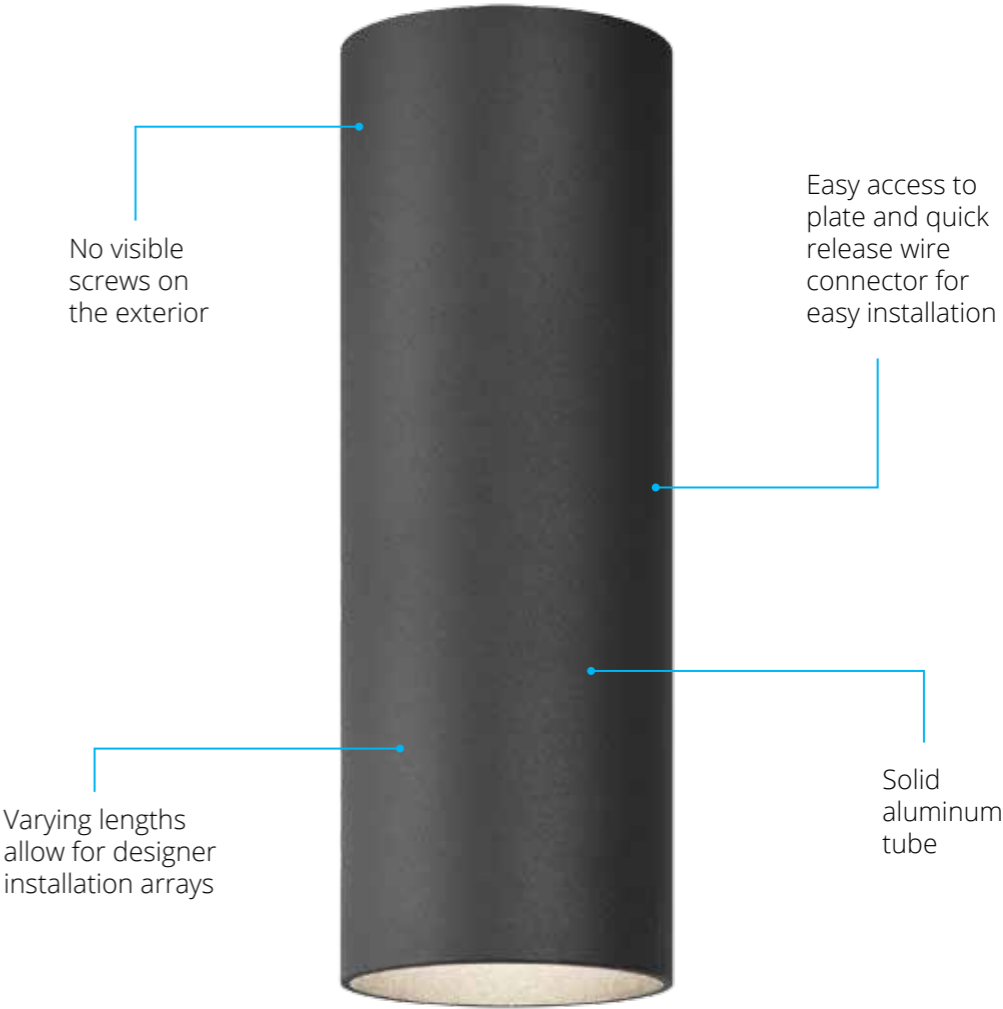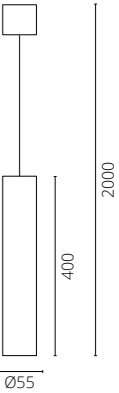



KITRON LED

Kitron enables near perfect use of the emitted lumens from the LED tube through its sleek and simple design. The two tubes house both the LED modules as well as the onboard LED driver unit. The Kitron is available in both 36W 3400lm and 48W 4400lm versions. The single tube is IP44 rated and available in 3 sizes making it an ideal solution for bathrooms. Kitron is the perfect economical luminaire solution.

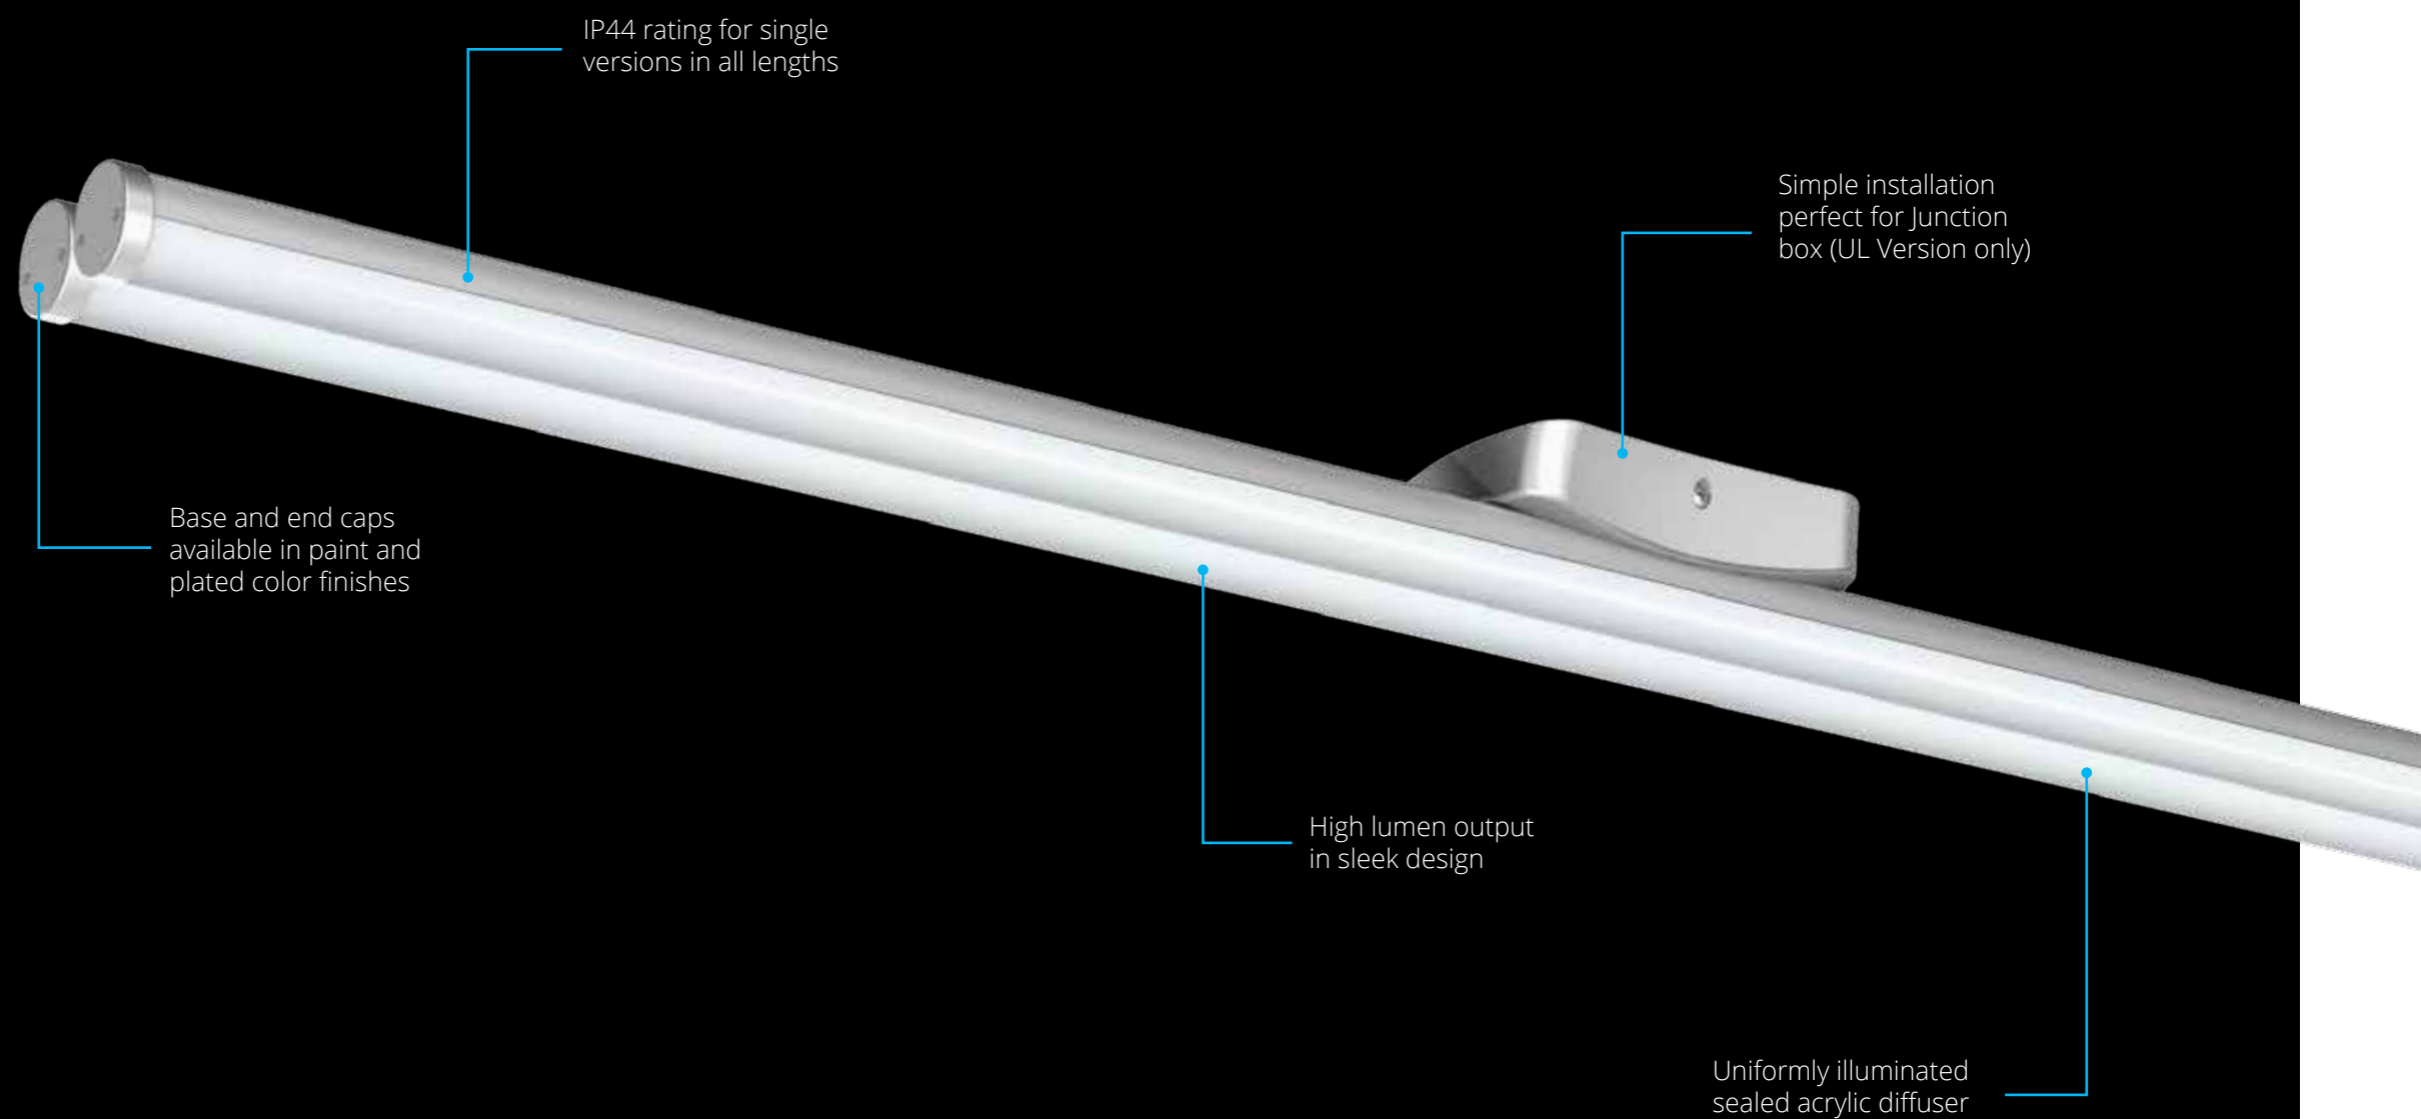

IP44 rating for single versions in all lengths

Simple installation perfect for Junction box (UL Version only)

Base and end caps available in paint and plated color finishes

High lumen output in sleek design

Uniformly illuminated sealed acrylic diffuser

KITRON2/36




Technical: 36W LED | 3400Lm | CRI 80
| 2700K-6000K | Included Control Gear |
220-240V | IP20

Material: Aluminium+PC

Color: White | Black | Nickle matt

Approvals: CE | RoHS

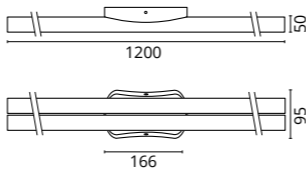

KITRON2/48




Technical: 48W LED | 4400Lm | CRI 80
| 2700K-6000K | Included Control Gear |
100-240V | IP20

Material: Aluminium+PC

Color: White | Black | Nickle matt

Approvals: CE | ETL | RoHS

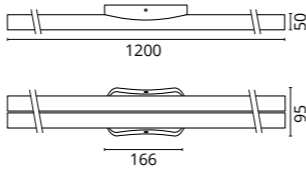

KITRON3/72




Technical: 72W LED | 6600Lm | CRI 80
| 2700K-6000K | Included Control Gear |
100-240V | IP20

Material: Aluminium+PC

Color: White | Black | Nickle matt

Measurement: 1200x129x58 mm

Approvals: CE | ETL | RoHS

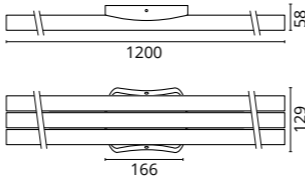

KITRON1/12




Technical: 12W LED | 1200Lm | CRI 80
| 2700K-6000K | Included Control Gear |
100-240V | IP44

Material: Aluminium+PC

Color: White | Black | Nickle matt

Approvals: CE | RoHS

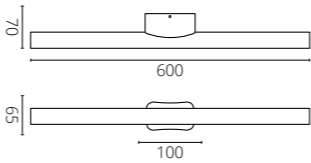

KITRON1/20




Technical: 20W LED | 1900Lm | CRI 80
| 2700K-6000K | Included Control Gear |
100-240V | IP44

Material: Aluminium+PC

Color: White | Black | Nickle matt

Approvals: CE | RoHS

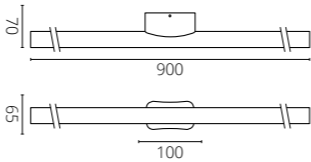

KITRON1/24




Technical: 24W LED | 2100Lm | CRI 80
| 2700K-6000K | Included Control Gear |
100-240V | IP44

Material: Aluminium+PC

Color: White | Black | Nickle matt

Approvals: CE | RoHS

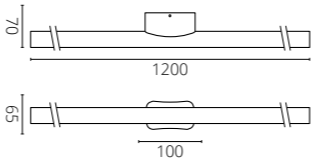



TORO

The Toro range is not only beautiful and eye catching, it is also designed to give good light to a space. We found that designer fixtures are often designed to looked pretty, but usually don't give off very good light. With Toro, we wanted to do both. Toro uses the latest LED technology to give a glare free bright light filtered through an acrylic lens.

TOROP54




Technical: 54W LED | 3200Lm | CRI 80 | 3000K | Meanwell Control Gear | 100-240V | IP20


Material: Aluminium+Acrylic

Color: White | Black

Approvals: CE | RoHS

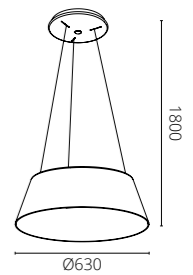

TOROP72

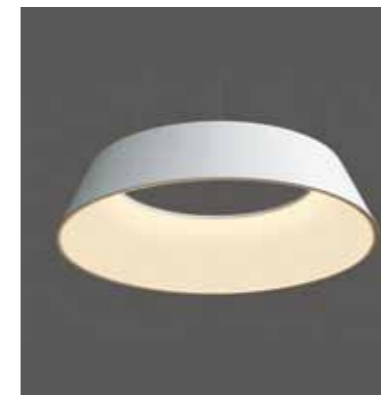


Technical: 72W LED | 4320Lm | CRI 80 | 3000K | Meanwell Control Gear | 100-240V | IP20

Material: Aluminium+Acrylic

Color: White | Black

Approvals: CE | RoHS

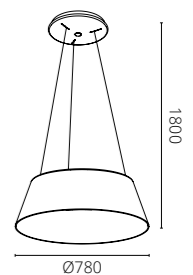

TOROP90




Technical: 90W LED | 5400Lm | CRI 80 | 3000K | Meanwell Control Gear | 100-240V | IP20

Material: Aluminium+Acrylic

Color: White | Black

Approvals: CE | RoHS

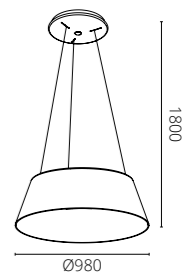



PIKO

This streamlined innovative track head combines aesthetics with elite functionality for the best lighting. Piko works perfectly in track applications paired with Philips LEDs and drivers integrated into the body all filtered through a brilliant lens. This system provides superior light quality at tremendous efficiency levels.



PIKO25




Technical: 24W LED Lumileds | 3000Lm (light source) 2510Lm (luminaire) | CRI 90 | 25°, 35°, 45° | 2700K, 3000K, 4000K | Osram Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

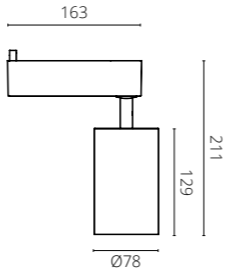

PIKO30




Technical: 31W LED Lumileds | 4000Lm (light source) 3350Lm (luminaire) | CRI 90 | 25°, 35°, 45° | 2700K, 3000K, 4000K | Osram Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

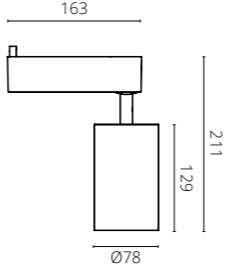

PIKO40




Technical: 37W LED Lumileds | 4625Lm (light source) 3890Lm (luminaire) | CRI 90 | 25°, 35°, 45° | 2700K, 3000K, 4000K | Osram Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

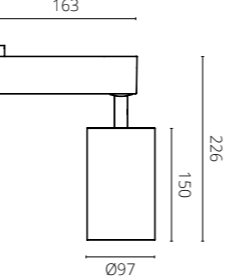



PIKO T10




Technical: 50W Par16 GU10 | 110-240 | IP20

Material: Aluminium

Color: White | Black | Brass

Approvals: CE



PIKO R10




Technical: 50W Par16 GU10 | 110-240 | IP20

Material: Aluminium

Color: White | Black | Brass

Approvals: CE

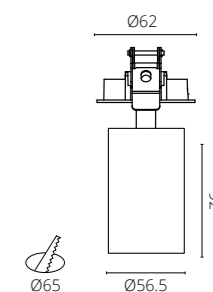



FOCUS

Focus has been designed to add just that tad of pizzaz in an elegant and sleek track head. Available in built-in or removeable light source options. The range of options within the Focus family will transition beautifully from home use to retail to museum applications.

FOCUS25




Technical: 24W LED Lumileds | 3000Lm (light source) 2250Lm (luminaire) | CRI 90 | 17°, 25°, 35°, 50° | 2700K, 3000K, 4000K | Osram Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

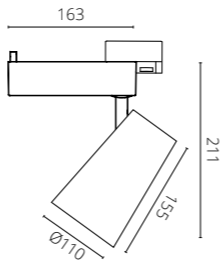

FOCUS30




Technical: 31W LED Lumileds | 4000Lm (light source) 2950Lm (luminaire) | CRI 90 | 17°, 25°, 35°, 50° | 2700K, 3000K, 4000K | Osram Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

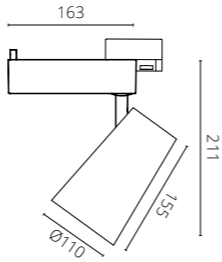

FOCUS40




Technical: 37W LED Lumileds | 4625Lm (light source) 3490Lm (luminaire) | CRI 90 | 17°, 25°, 35°, 50° | 2700K, 3000K, 4000K | Osram Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

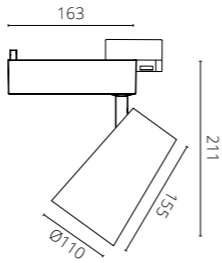



FOCUS T10




Technical: 50W Par16 GU10 | 110-240 | IP20

Material: Aluminium

Color: White | Black

Approvals: CE



FOCUS R10




Technical: 50W Par16 GU10 | 110-240 | IP20

Material: Aluminium

Color: White | Black

Approvals: CE

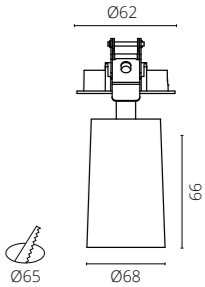

SLIK

The Slik series of ceiling mount downlights and pendants work in perfect harmony for nearly every application. This versatile series offers a fixed downlight and an adjustable option that can serve as a wall washer. The Bridgelux COB with an aluminum reflector creates a dazzling downlight. The halo surrounding the center LED softens the light and finishes off this beautiful fixture.





SLIKR




Technical: 9W LED Bridgelux | 920Lm (light source) 800Lm (luminaire) | CRI 80 | 24°, 36° | 3000K | HEP Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



SLIKADJ




Technical: 14W LED Bridgelux | 1354Lm (light source) 992Lm (luminaire) | CRI 80 | 24°, 36° | 3000K | HEP Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



SLIKP5




Technical: 5W LED Bridgelux | 440Lm (light source) 315Lm (luminaire) | CRI 80 | 24°, 36° | 3000K | HEP Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

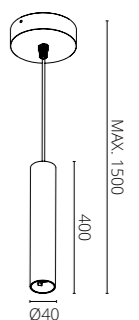

SLIKP9




Technical: 9W LED Bridgelux | 870Lm (light source) 770Lm (luminaire) | CRI 80 | 24°, 36° | 3000K | HEP Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

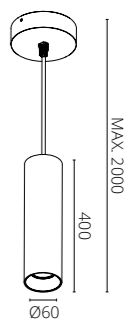



VEEP

This uplight wall lamp offers high lumen outputs from a beautiful luminaire. By integrating linear LED modules into an aluminium body, the Veep offers as much as 2800 lumens of light output. The 90 degree angle coupled with laser cut corners, makes this lamp seamless with an absolutely flawless paint finish.

Available in two sizes and in four different lumen packages, the Veep series will offer just the right amount of light for your space. We understand the importance of simple lighting control in a home environment, so we made the Veep series available in Triac dimming versions. Once again, fulfilling our vision of creating functional designer products

VEEPS1




Technical: 7W LED OSRAM | 1000Lm (light source) 750Lm (luminaire) | CRI 80 | 3000K, 4000K | Tridonic Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



VEEPS2




Technical: 13W LED OSRAM | 1755Lm (light source) 1350Lm (luminaire) | CRI 80 | 3000K, 4000K | Tridonic Triac Dimmable Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



VEEPL1




Technical: 11W LED OSRAM | 1485Lm (light source) 1100Lm (luminaire) | CRI 80 | 3000K, 4000K | Tridonic Triac Dimmable Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

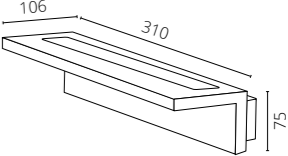

VEEPL2




Technical: 22W LED OSRAM | 2970Lm (light source) 2200Lm (luminaire) | CRI 80 | 3000K, 4000K | Tridonic Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

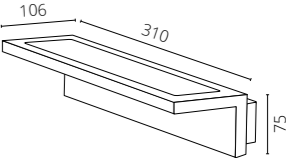

SHELPHY

Our Shelphy series uplight offers high lumen in a sleek design. With the use of twin COB LED chips this brilliant lamp offers perfect uplight for home and hotel applications. Shelphy Slot has been a standout product in our range for years. Now, with the launch of our slotless version, we know this lamp will continue to be a star in many projects.

SHELPHYSLOT




Technical: 12W LED Bridgelux | 1400Lm (light source) 850Lm (luminaire) | CRI 80 | 3000K | HEP Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

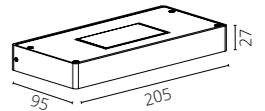

SHELPHYSLOT XL




Technical: 29W LED Bridgelux | 2950Lm (light source) 2350Lm (luminaire) | CRI 80 | 3000K | Included Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

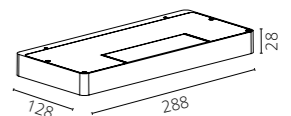

SHELPHYXL




Technical: 29W LED Bridgelux | 2950Lm (light source) 2350Lm (luminaire) | CRI 80 | 3000K | Included Control Gear | 220-240V | IP20

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS

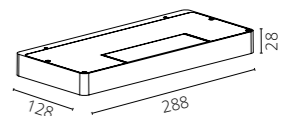

NOLA

The Nola light was created as the perfect light for bedside applications. We realized that people want personal light that doesn't disturb their partner. We also realized that goosenecks are chunky, clumsy, and frankly, ugly. We used a rocker switch and put it right where you think it will be, making it easy to find and operate in the dark. We set the LED deep inside the tube and added a black ring to reduce the glare. Finally, we found the perfect paint and brushed finishes. All this makes Nola our favourite bedside light yet.



NOLA




Technical: 3W LED Philips | 157Lm | CRI 80
| 3000K | Included Control Gear | 220-240V
| IP20

Material: Aluminium

Color: White | Black | Brass


Approvals: CE



BEACON

Beacon began as a sketch on a piece of paper and a vision of putting a new twist on a classic lamp. Our design inspiration was a lighthouse standing as a beacon of guidance and leading the way. We have incorporated the latest available technologies in a refreshingly sleek design. This range of outdoor lamps includes ceiling, wall and bollard options in both E27 and LED versions. This spectacular series will incorporate itself beautifully into modern and classically designed projects while providing the perfect pathway and entry lighting for navigating the space.

Patent pending

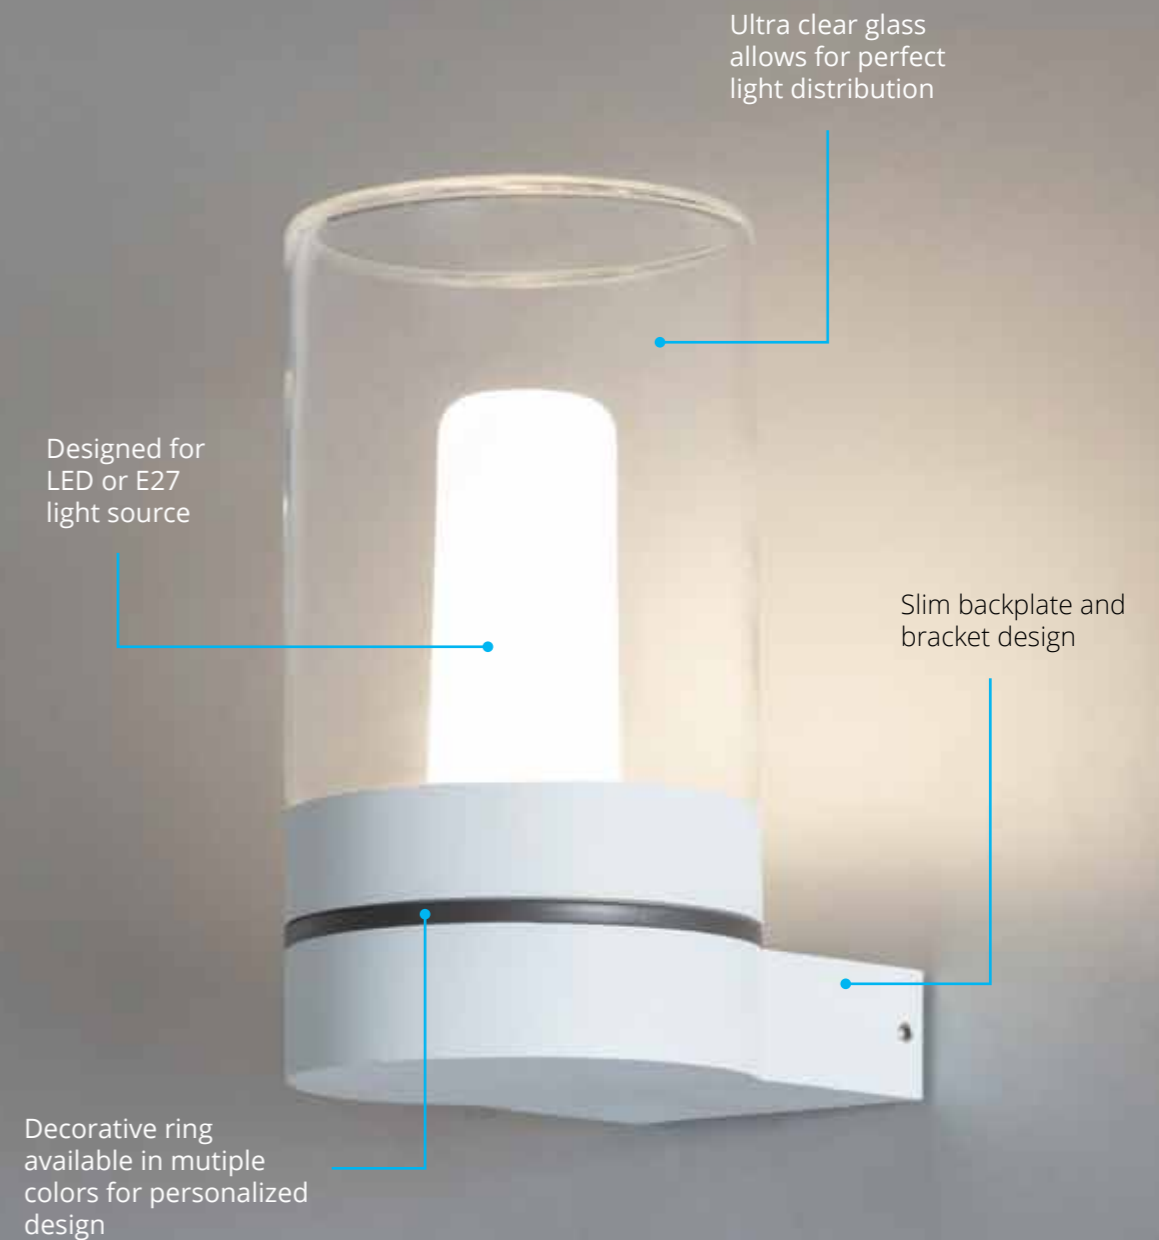

BEACONW LED




Technical: 12W LED | 1200Lm (Light source) 600Lm (luminaire) | CRI 80 | 3000K-6000K | Included Control Gear | 100-240V | IP54

Material: Aluminium+Glass

Color: White | Grey | Dark Grey

Approvals: CE | RoHS

* Lamp is supplied with 2 colored rings allowing you to personalize the final appearance

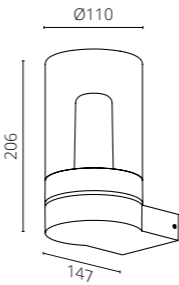

BEACONW




Technical: 60W E27 | 100-240V | IP54

Material: Aluminium+Glass

Color: White | Grey | Dark Grey

Approvals: CE | RoHS

* Lamp is supplied with 2 colored rings allowing you to personalize the final appearance

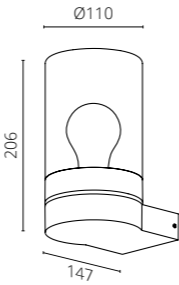

BEACONSURF LED




Technical: 12W LED | 1200Lm (Light source) 600Lm (luminaire) | CRI 80 | 3000K | Included Control Gear | 100-240V | IP54

Material: Aluminium+Glass

Color: White | Grey | Dark Grey

Approvals: CE | RoHS

* Lamp is supplied with 2 colored rings allowing you to personalize the final appearance



BEACONSURF




Technical: 60W E27 | 100-240V | IP54

Material: Aluminium+Glass

Color: White | Grey | Dark Grey

Approvals: CE | RoHS

* Lamp is supplied with 2 colored rings allowing you to personalize the final appearance



BEACONB LED



Technical: 12W LED | 1200Lm (Light source) 600Lm (luminaire) | CRI 80 | 3000K-6000K | Included Control Gear | 100-240V | IP54

Material: Aluminium+Glass

Color: White | Grey | Dark Grey

Approvals: CE | RoHS

* Lamp is supplied with 2 colored rings allowing you to personalize the final appearance

BEACONB



Technical: 60W E27 | 100-240V | IP54

Material: Aluminium+Glass

Color: White | Grey | Dark Grey

Approvals: CE | RoHS

* Lamp is supplied with 2 colored rings allowing you to personalize the final appearance



RIFT

Architecture deserves to have a stunning nightlife. RIFT gives you the ability to perfectly outline window frames and spaces to create striking light patterns. To ensure perfect end to end light distribution, two LEDs have been paired with two polycarbonate lenses. A unique lift and adjust system has also been included so that you will have a perfect installation angle every time.

Patent pending



Internal polycarbonate
encasing for waterproofing

Narrow beam
angle for perfect
light spread

Aluminum
diecast housing

Adjustment legs allow for
post installation adjustments
and perfect alignment



RIFT




Technical: 5W LED Philips | 450Lm (light source) 200Lm (Luminaire) | CRI 80 | 3000K | Included Control Gear | 220-240V | IP65

Material: Aluminium+PC

Color: White | Grey | Dark Grey

Approvals: CE | RoHS




RAZR

This waterproof unibody luminaire was created to utilize edge-lit LED technology in a sleek yet stunning design. The removable bracket design allows RAZR to be installed at a 45 degree angle, wall and ceiling applications. The perfectly uniform illuminated face delivers high lumen output with reduced glare. With two versions, at 1800 and 1000 lumens, RAZR will perfectly meet the needs of many outdoor applications.

Registered patent



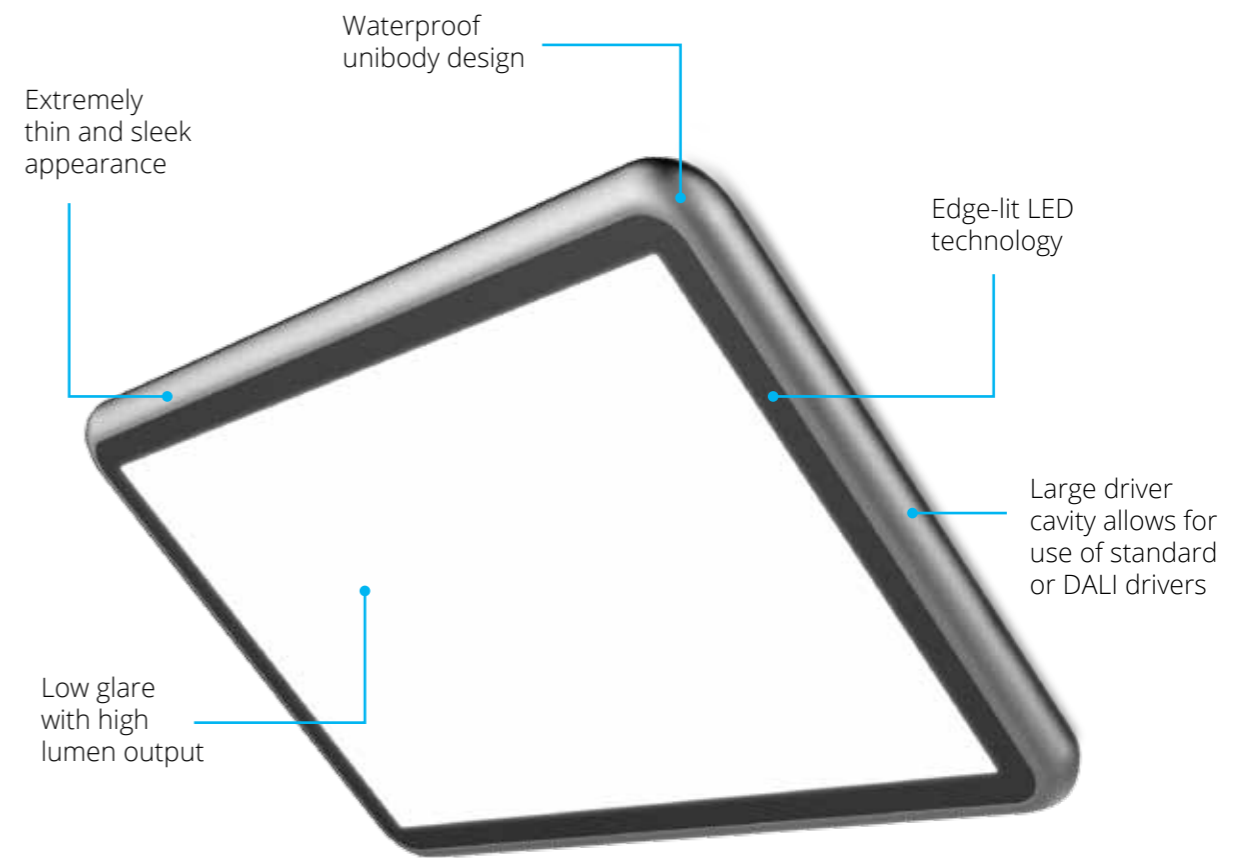

RAZR




Technical: 30W LED | 1800Lm |
CRI 80 | 3000K-6000K | Tridonic Control
Gear | 220-240V | IP54

Material: Aluminium+Glass

Color: White | Grey | Dark Grey

Approvals: CE | RoHS

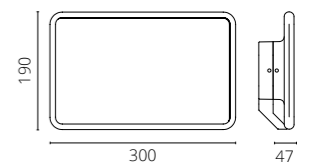

TRIGO

The Trigo flood light series was launched as the completely reengineered LED version of our globally popular wall light. Leaving behind the die cast molds, we have moved to extrusion production methods for the Trigo series ensuring higher and more accurate heat dissipation. Due to the progress in LED technology, this lamp is now offered in higher lumen packages than ever before. Brand new for 2019 we have added in our Tri-K technology, enabling our clients to have three color temperatures built in to each of our Trigo luminaires.

Patent pending

Removeable inner plate with quick connector for ease of assembly and service

Magnetic cover creates a completely screwless face

Polycarbonate diffuser creates even light distribution

Large surface area leads to high lumen output at low glare levels

TRIGO30




Technical: 35W LED OSRAM | 3900Lm (Light source) 2100Lm (Luminaire) | CRI 80 | 3000K-6000K, TRI-K | Tridonic Control Gear | 220-240V | IP54

Material: Aluminium + PC

Color: White | Grey | Dark Grey

Approvals: CE | RoHS

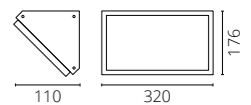

TRIGO60



Technical: 65W LED OSRAM | 7200Lm (Light source) 4100Lm (Luminaire) | CRI 80 | 3000K-6000K, TRI-K | Tridonic Control Gear | 220-240V | IP54

Material: Aluminium + PC

Color: White | Grey | Dark Grey

Approvals: CE | RoHS





CONE

We find that the best way to design the perfect light is by accident. While working on a completely different range, we found that our Cone series kept emerging right in front of us. Eventually, Cone convinced us that we should complete its form and launch it into our range. The single and bidirectional light emitted through the customized lens creates a stunning pattern and perfect light cut off. The choice of the lens over a more traditional reflector allowed us to achieve a beautiful controlled light cone without adding height to the luminaire.

CONE




Technical: 10W LED CREE | 1050Lm (light source) 900Lm (Luminaire) | CRI 80 | 12°, 24°, 36° | 3000K, 4000K | Included Control Gear | 100- 240V | IP65

Material: Aluminium

Color: White | Black | Dark grey

Approvals: CE



CONE2




Technical: 14W LED CREE | 1470Lm (Light source) 1260Lm (Luminaire) | CRI 80 | 12°, 24°, 36° | 3000K, 4000K | Included Control Gear | 100- 240V | IP65

Material: Aluminium

Color: White | Black | Dark grey


Approvals: CE

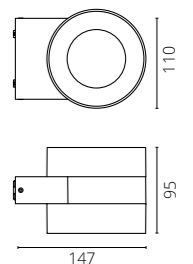



STEVE

The Steve series is a slim line of outdoor wall luminaires. The integrated LED sits behind a sealed prismatic glass allowing for high lamp efficiency. The waterproofing mechanism on the installation side is done through overlapping components ensuring a perfect IP54 enclosure.

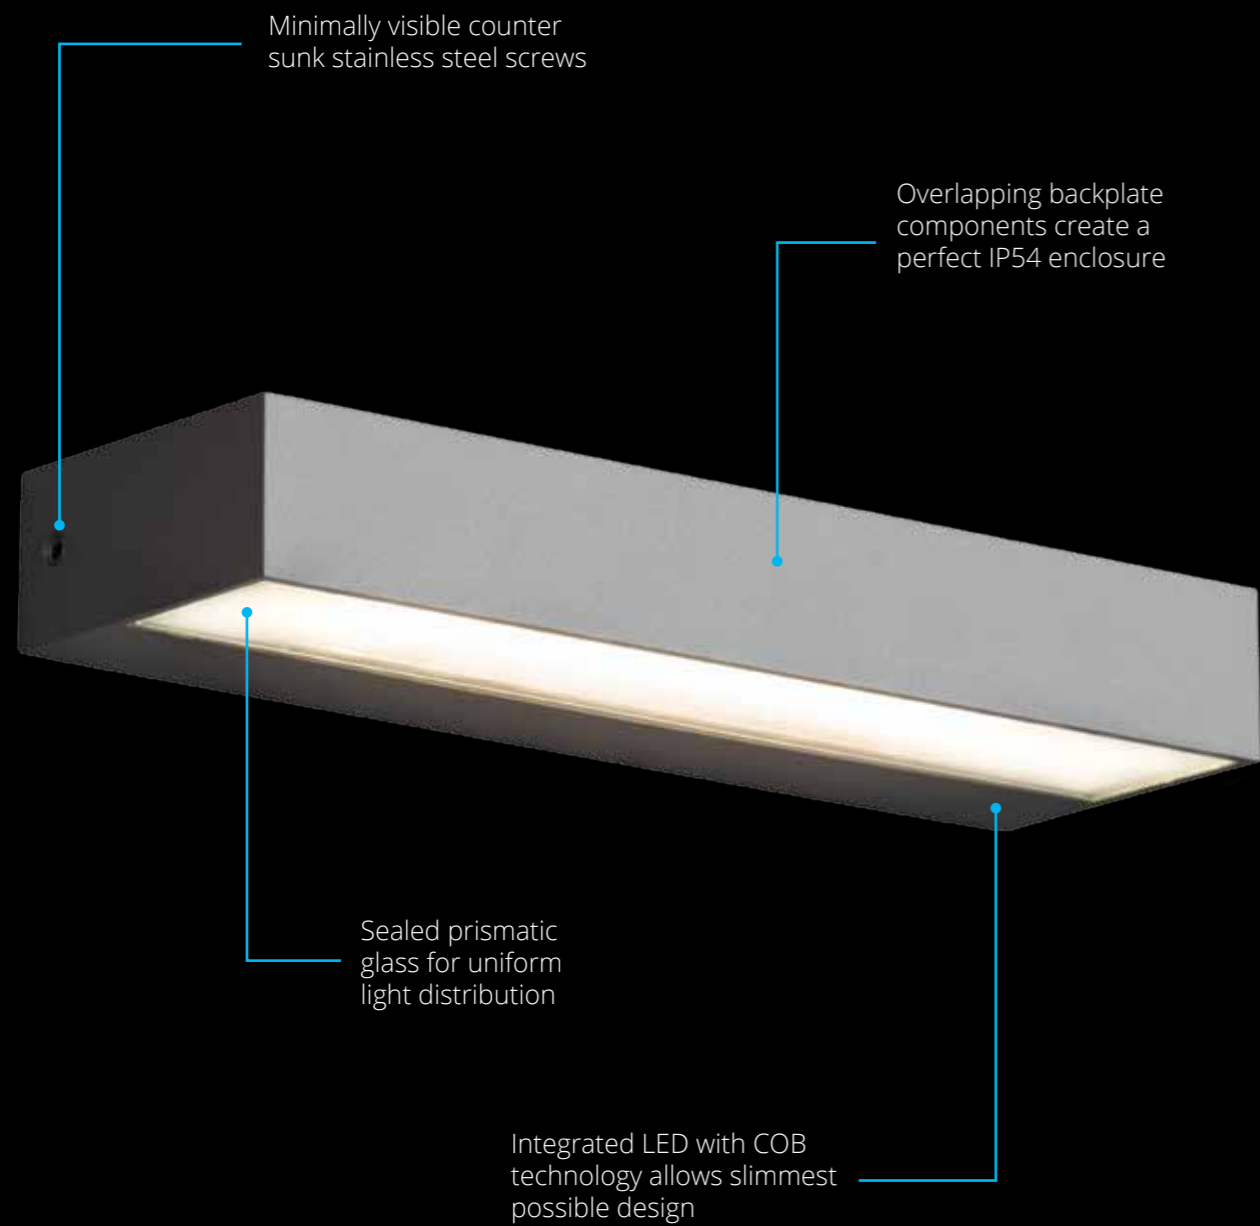

STEVE




Technical: 12W LED | 720Lm (Light source) 600Lm (Luminaire) | CRI 80 | 3000K-6000K | 220-240V | IP65

Material: Aluminium

Color: White | Grey | Dark Grey

Approvals: CE | RoHS



STEVE2




Technical: 16W LED | 960Lm (Light source) 900Lm (Luminaire) | CRI 80 | 3000K-6000K | 220-240V | IP65

Material: Aluminium

Color: White | Grey | Dark Grey

Approvals: CE | RoHS



STEVE MINI




Technical: 6W LED | 400Lm (Light source) 360Lm (Luminaire) | CRI 80 | 3000K-6000K | 220-240V | IP65

Material: Aluminium


Color: White | Grey | Dark Grey

Approvals: CE | RoHS



STONE

Our new recessed wall light series seamlessly integrates into facades made of a range of materials. The pressured spring installation method enables a screwless face design. Much care was given to the waterproofing and sealing of the luminaire that is maintained after installation. The concealed downward throw of the light creates a striking spread of light while maintaining exceptional visual comfort.

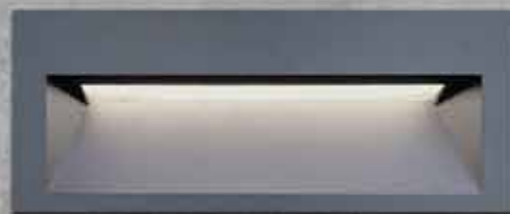

STONE 1




Technical: 4W LED | 240Lm (Light source)
120Lm (Luminaire) | CRI 80 | 3000K-6000K
| Included Control Gear | 220-240V | IP65

Material: Aluminium

Color: White | Black | Dark grey

Approvals: CE



STONE 2




Technical: 10W LED | 600Lm (Light source)
400Lm (Luminaire) | CRI 80 | 3000K-6000K
| Included Control Gear | 220-240V | IP65

Material: Aluminium


Color: White | Black | Dark grey


Approvals: CE

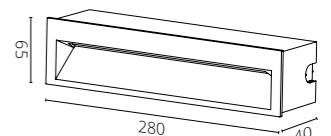

BRIX

The brix series is a wonderful addition to any pathway and entrance way. Whether recessed or surface mount installation both offer a down light and even spread of light over a wide area. This slim led linear design uses a unique bracketing technology allowing for center screws for applying the face to the body that guarantees a perfect waterproofing fit every time.

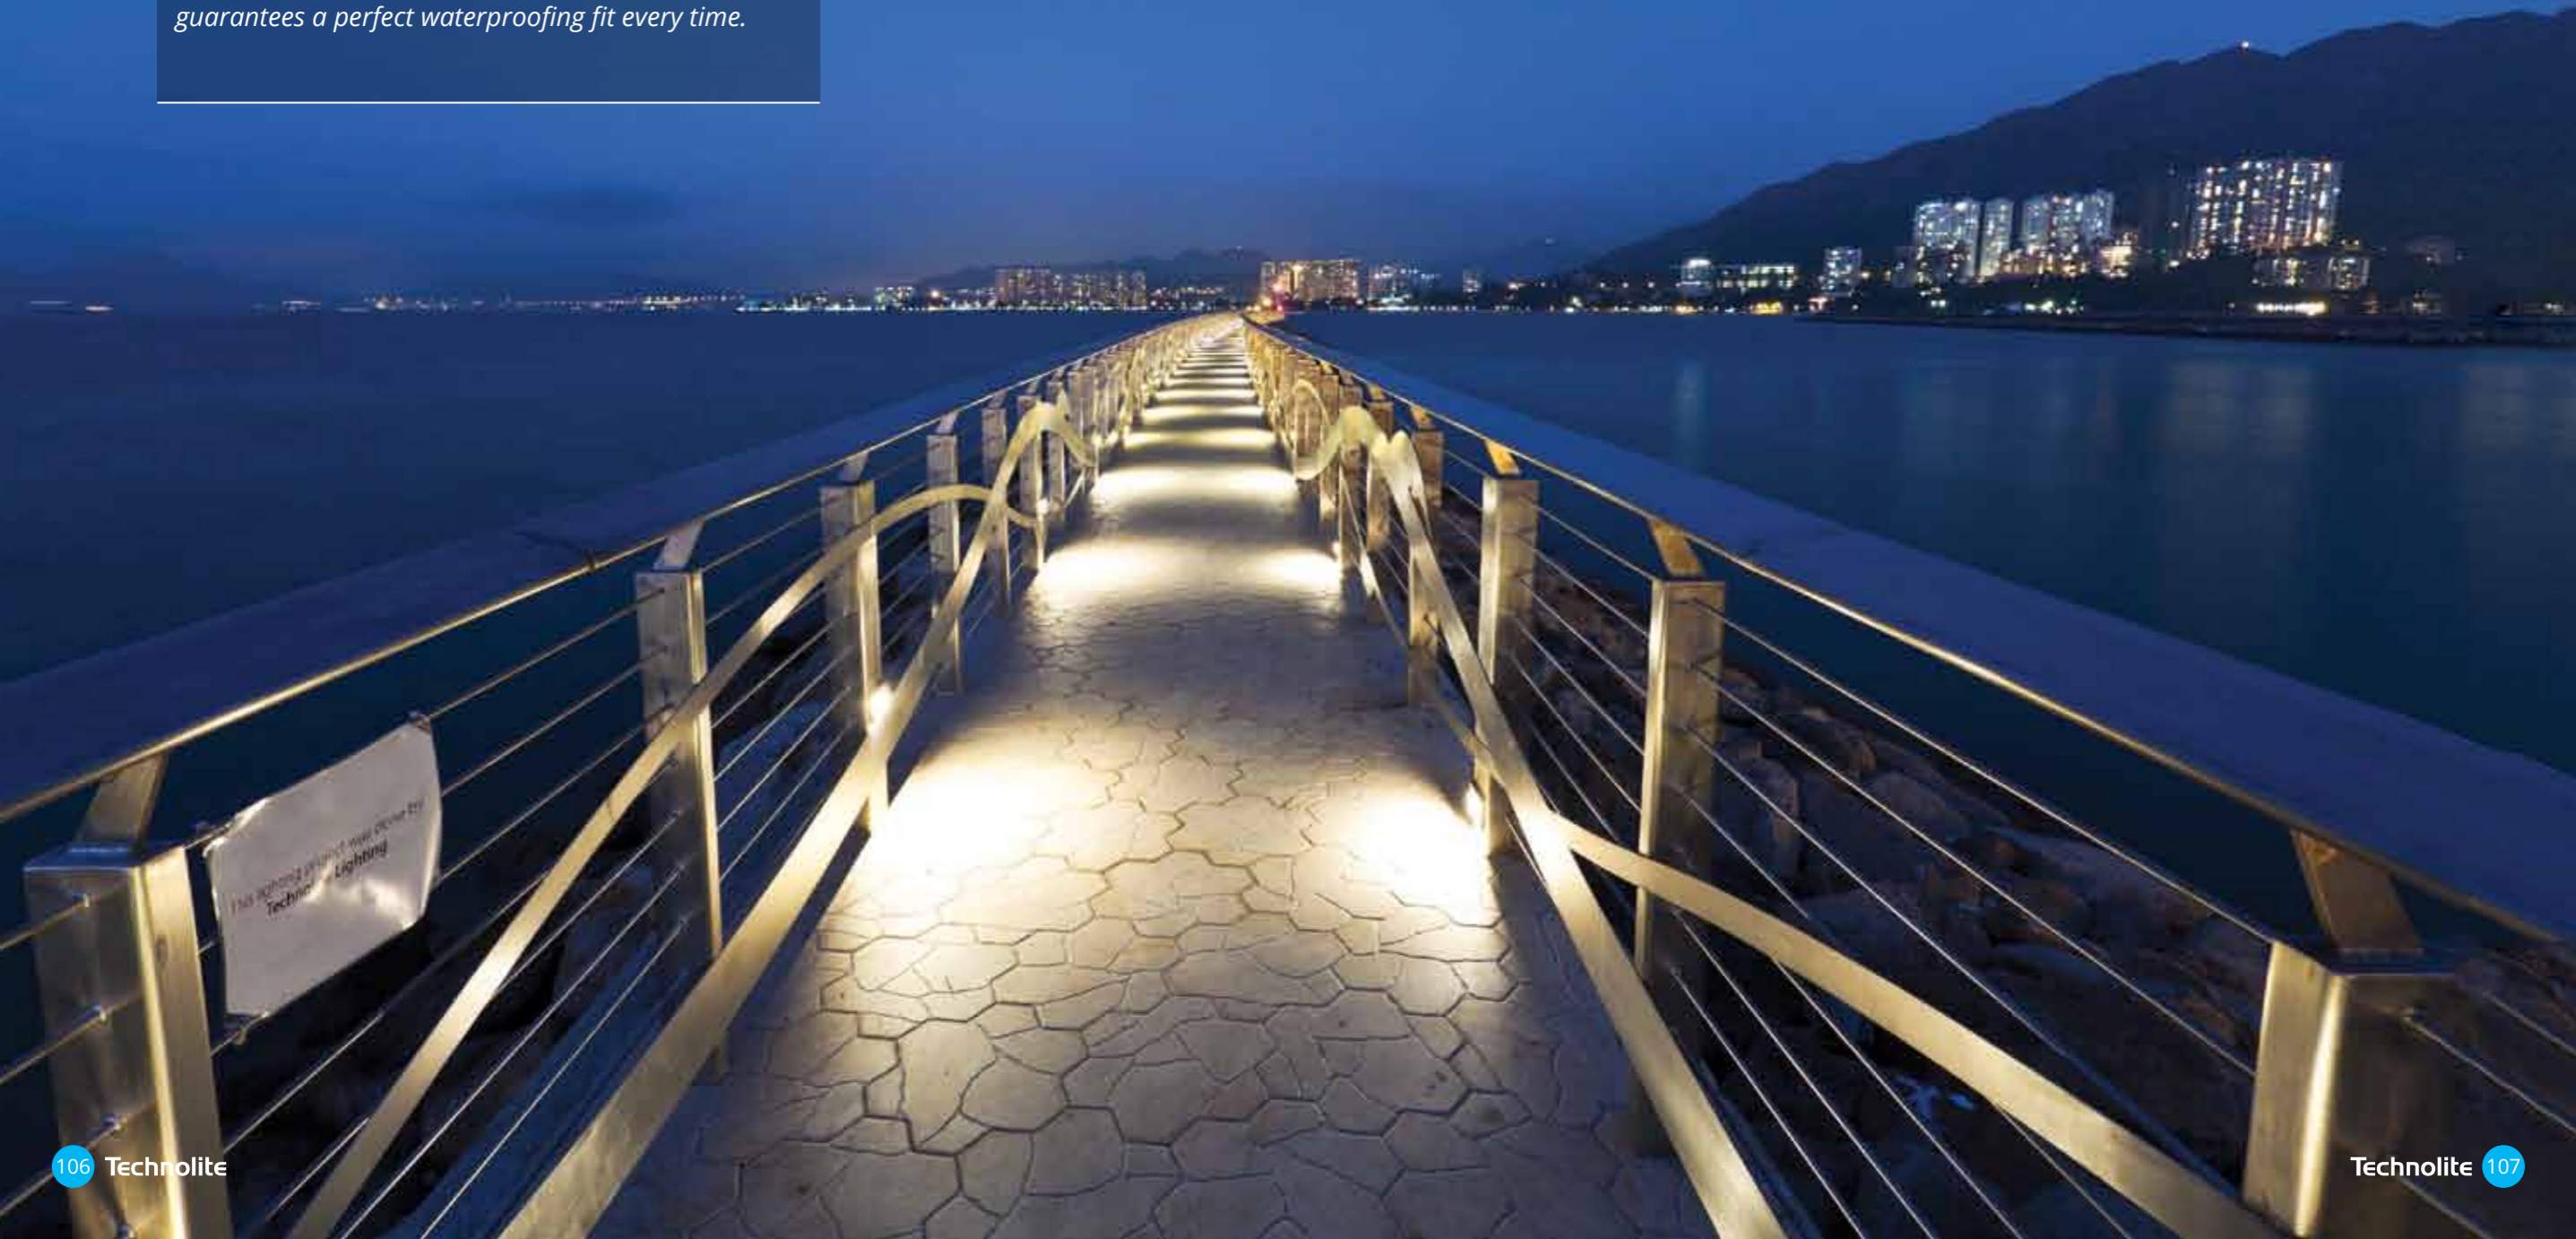

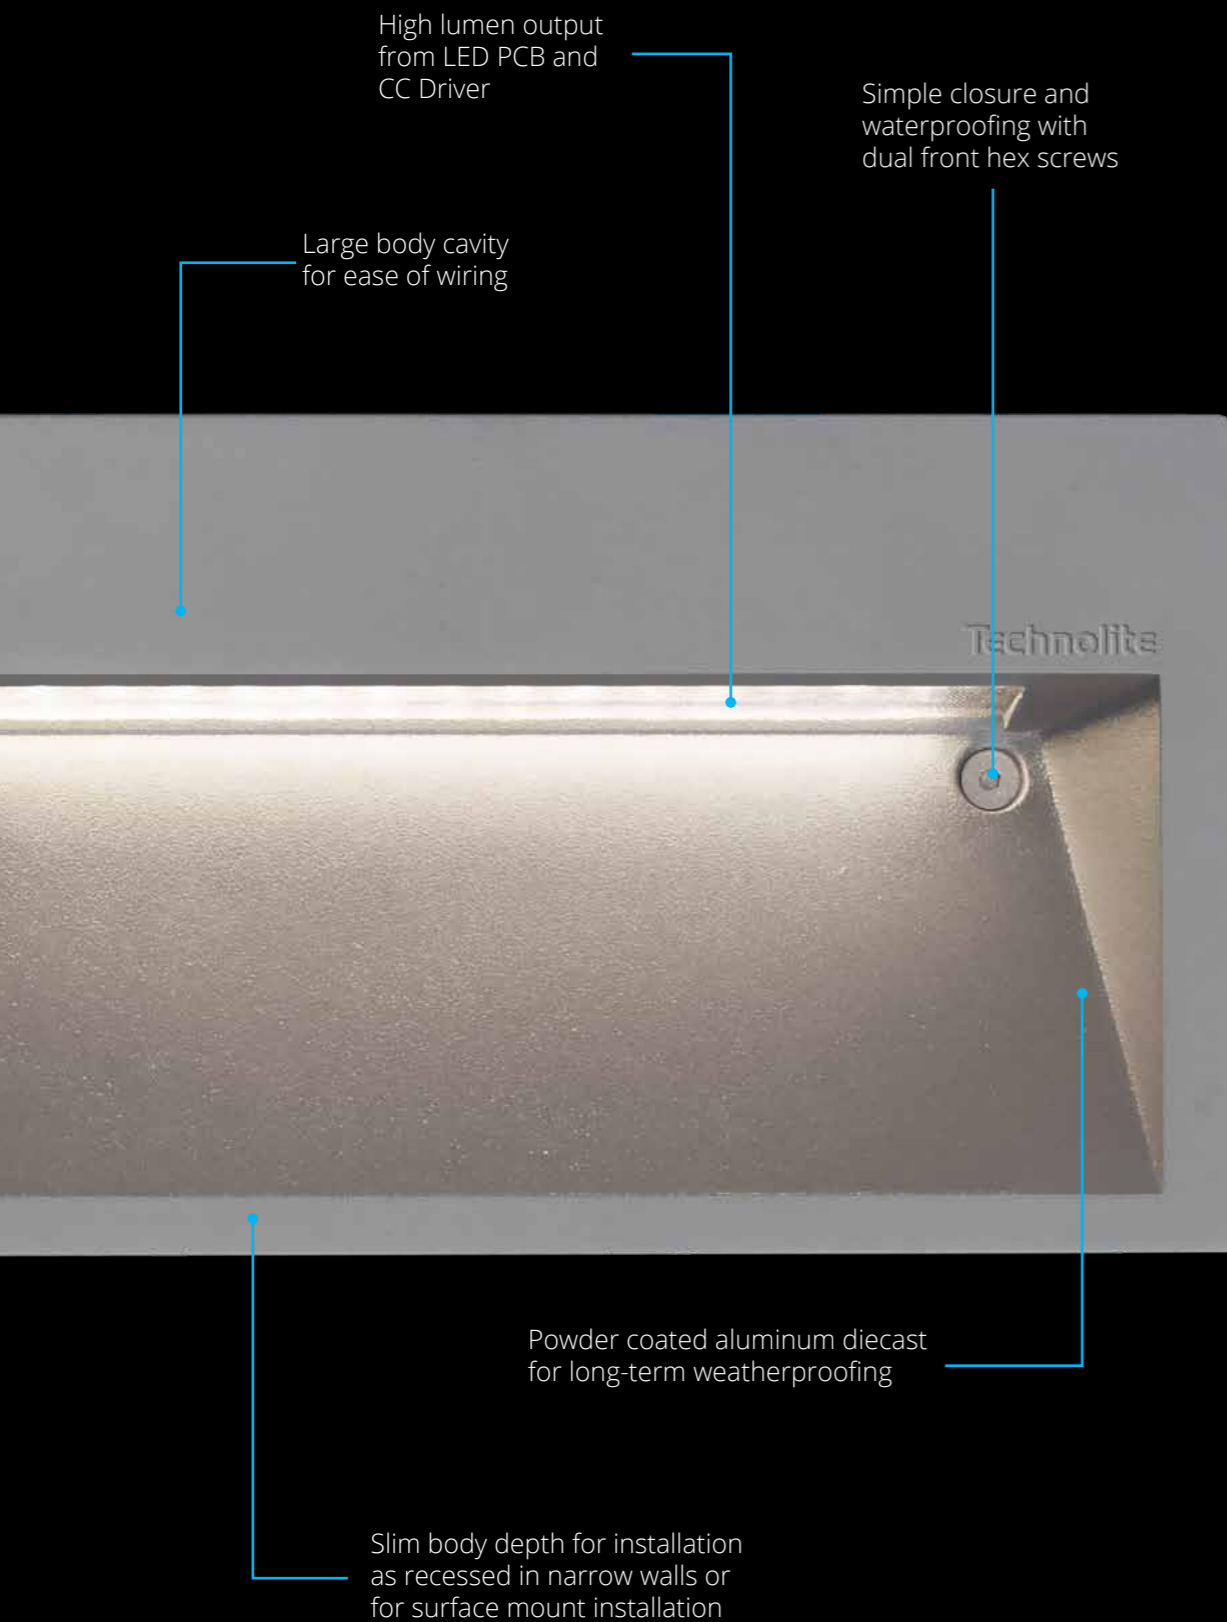

BRIXR




Technical: 10W LED | 600Lm (Light source)
400Lm (Luminaire) | CRI 80 | 3000K-6000K
| Tridonic Control Gear | 220-240V | IP54

Material: Aluminium

Color: White | Grey | Dark Grey

Approvals: CE | RoHS

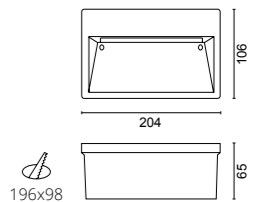

BRIXS




Technical: 10W LED | 600Lm (Light source)
400Lm (Luminaire) | CRI 80 | 3000K-6000K
| Tridonic Control Gear | 220-240V | IP54

Material: Aluminium

Color: White | Grey | Dark Grey

Approvals: CE | RoHS



BRIXmini




Technical: 4W LED | 240Lm (Light source)
120Lm (Luminaire) | CRI 80 | 3000K-6000K
| Included Control Gear | 220-240V | IP54

Material: Aluminium

Color: White | Grey | Dark Grey

Approvals: CE | RoHS



TRACE




Technical: 2W LED Osram | 95Lm |
CRI 85 | 3000K-6000K | 24V | IP65

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



TRACE316




Technical: 2W LED Osram | 95Lm |
CRI 85 | 3000K-6000K | 24V | IP65

Material: Stainless Steel 316

Color: Stainless

Approvals: CE | RoHS



TRACEBRASS




Technical: 2W LED Osram | 95Lm |
CRI 85 | 3000K-6000K | 24V | IP65

Material: Brass

Color: Brass

Approvals: CE | RoHS



BLAST

Blast will highlight the architectural contours of your house in a stunning fashion. The effect of the light spread created by using the Bridgelux LED is striking in its precision and beautiful in its design. This clean lined wall lamp is the perfect addition to any outdoor space that needs illumination.

Overlapping backplate components create a perfect IP65 enclosure

Stunning smooth paint finish

Rear facing LED for stunning wall wash design

High lumen output in clean design

BLAST




Technical: 14W LED Bridgelux | 875Lm | CRI 80 | 3000K | HEP Control Gear | 220-240V | IP65

Material: Aluminium

Color: White | Grey | Dark Grey

Approvals: CE | RoHS



XBOX

Xbox will highlight the architectural contours of your house in a stunning fashion. The effect of the light spread created by using the Bridgelux LED is striking in its precision and beautiful in its design. With adjustable louvers on both the top and bottom, you get to design the precise angles to meet your needs and design.



XBOX




Technical: 9W LED Bridgelux | 471Lm | CRI 80 | 3000K | HEP Control Gear | 220-240V | IP54

Material: Aluminium

Color: White | Grey | Dark Grey

Approvals: CE | RoHS



FACE

Face is a diecast series of outdoor wall luminaires in a sleek and clean design. The integrated CREE led takes care of giving a stunning light color while the wide range of available optics will allow you to create beautiful light patterns on building surfaces. Whether in round or square, you can be assured that the FACE lamp will make your project shine.



FACER1




Technical: 6W LED CREE | 511Lm (light source) 420Lm (Luminaire) | 15°, 25°, 35° | 3000K-6000K | HEP Control Gear | 100-240V | IP65

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



FACER2




Technical: 11W LED CREE | 1023Lm (light source) 840Lm (Luminaire) | 15°, 25°, 35° | 3000K-6000K | HEP Control Gear | 100-240V | IP65

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



FACES1




Technical: 6W LED CREE | 511Lm (light source) 420Lm (Luminaire) | 15°, 25°, 35° | 3000K-6000K | HEP Control Gear | 100-240V | IP65

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



FACES2




Technical: 11W LED CREE | 1023Lm (light source) 840Lm (Luminaire) | 15°, 25°, 35° | 3000K-6000K | HEP Control Gear | 100-240V | IP65

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



FaceMAX R1




Technical: 16W LED Cree | 1157Lm (light source) 960 (Luminaire) | CRI 85 | 15°, 38°, 60° | 3000K-6000K | HEP Control Gear | 100-277V | IP65

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



FaceMAX R2




Technical: 31W LED Cree | 2493Lm (light source) 2200 (Luminaire) | CRI 85 | 15°, 38°, 60° | 3000K-6000K | HEP Control Gear | 220-240V | IP65


Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



FaceMAX S1

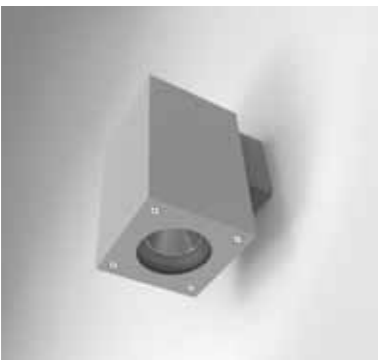


Technical: 16W LED Cree | 1157Lm (light source) 960 (Luminaire) | CRI 85 | 15°, 38°, 60° | 3000K-6000K | HEP Control Gear | 100-277V | IP65

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



FaceMAX S2




Technical: 31W LED Cree | 2493Lm (light source) 2200 (Luminaire) | CRI 85 | 15°, 38°, 60° | 3000K-6000K | HEP Control Gear | 220-240V | IP65

Material: Aluminium

Color: White | Black

Approvals: CE | RoHS



SPIN

Spin is our flush mount outdoor series. The face and sides of the lamp are kept completely clean by use of a unique magnetic enclosure. Perfectly uniform light achieved with the LED PCB. Large driver cavity allows for DALI and other smart system integration. Highly waterproofed IP65 rating makes this lamp perfect for all outdoor applications.





SPIN15




Technical: 15W LED | 1000Lm (light source) 620 (Luminaire) | CRI 80 | 3000K-6000k| Included Control Gear | 220-240V | IP54

Material: Aluminium+PC

Color: White | Grey | Dark Grey

Approvals: CE | RoHS



SPIN30




Technical: 30W LED | 2100Lm (light source) 1100 (Luminaire) | CRI 80 | 3000K-6000k | Included Control Gear | 220-240V | IP54

Material: Aluminium+PC

Color: White | Grey | Dark Grey

Approvals: CE | RoHS



METRO

Maybe it's the strength and durability of our acrylic tube, or maybe it is the lock and seal of our end caps. Or maybe it's the high performance linear LED and driver combo that is pumping out all those lumens. Either way, you are going to be able to take our Metro anywhere. We put this lamp through its paces and it came out smiling from the IP69K test. What's IP69K? Only the harshest test of our product, making sure it will stand the test of time whether in your food factory getting sanitized daily with high pressure hot water jets, or even just lighting up your garage. Metro is the go anywhere, do everything luminaire.



METRO70 L




Technical: 50W LED OSRAM | 3600Lm
| CRI 85 | 3000K, 4000K, 6000K |
Tridonic Control Gear | 220-240V |
IP69K

Material: PC

Color: White

Approvals: CE | RoHS



METRO70 S




Technical: 25W LED OSRAM | 1800Lm
| CRI 85 | 3000K, 4000K, 6000K |
Tridonic Control Gear | 220-240V |
IP69K

Material: PC

Color: White

Approvals: CE | RoHS





HALO

Halo is the perfect inground lamp series. Halo uses a CREE COB coupled with a built in HEP driver. The built in driver ensures no more fumbling around with transformers and complicated wiring and failed waterproofing. The primary material that we used is 316 stainless steel which guarantees that the Halo lamps are built to last and stand up to even the harshest of elements. We even offer this lamp in 316L when needed for Marine applications. This lamp is the perfect in-ground lamp for gardens, decks, steps and pathways.

HALO ADJ has all the benefits of our HALO series and adds on the adjustability to get your project looking just right.



HALO7




Technical: 8W LED CREE | 683Lm (light source) 473Lm (Luminaire) | CRI 85 | 15°, 24°, 36° | 3000K-6000K | HEP Control Gear | 100-240V | IP67

Material: Stainless steel 316

Color: Stainless steel

Approvals: CE | RoHS

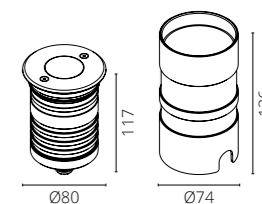

HALO13




Technical: 16W LED CREE | 1276Lm (light source) 815Lm (Luminaire) | CRI 85 | 15°, 24°, 36° | 3000K-6000K | HEP Control Gear | 100-240V | IP67

Material: Stainless steel 316

Color: Stainless steel

Approvals: CE | RoHS

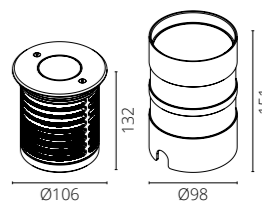

HALO18




Technical: 22W LED CREE | 1665Lm (light source) 1451Lm (Luminaire) | CRI 85 | 15°, 24°, 36° | 3000K-6000K | HEP Control Gear | 100-277V | IP67

Material: Stainless steel 316

Color: Stainless steel

Approvals: CE | RoHS

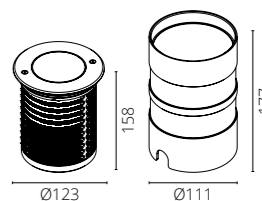

HALO7ADJ




Technical: 8W LED CREE | 687Lm (light source) 533Lm (Luminaire) | CRI 85 | 15°, 24°, 36° | 3000K-6000K | HEP Control Gear | 100-240V | IP67

Material: Stainless steel 316

Color: Stainless steel

Approvals: CE | RoHS

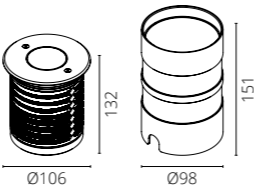

HALO13ADJ




Technical: 16W LED CREE | 1083Lm (light source) 975Lm (Luminaire) | CRI 85 | 15°, 24°, 36° | 3000K-6000K | HEP Control Gear | 100-240V | IP67

Material: Stainless steel 316

Color: Stainless steel

Approvals: CE | RoHS

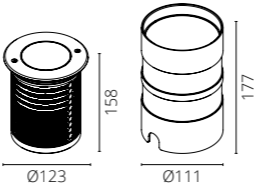

HALO18ADJ





Technical: 22W LED CREE | 1555Lm (light source) 1010Lm (Luminaire) | CRI 85 | 15°, 24°, 36° | 3000K-6000K | HEP Control Gear | 100-277V | IP67

Material: Stainless steel 316

Color: Stainless steel

Approvals: CE | RoHS

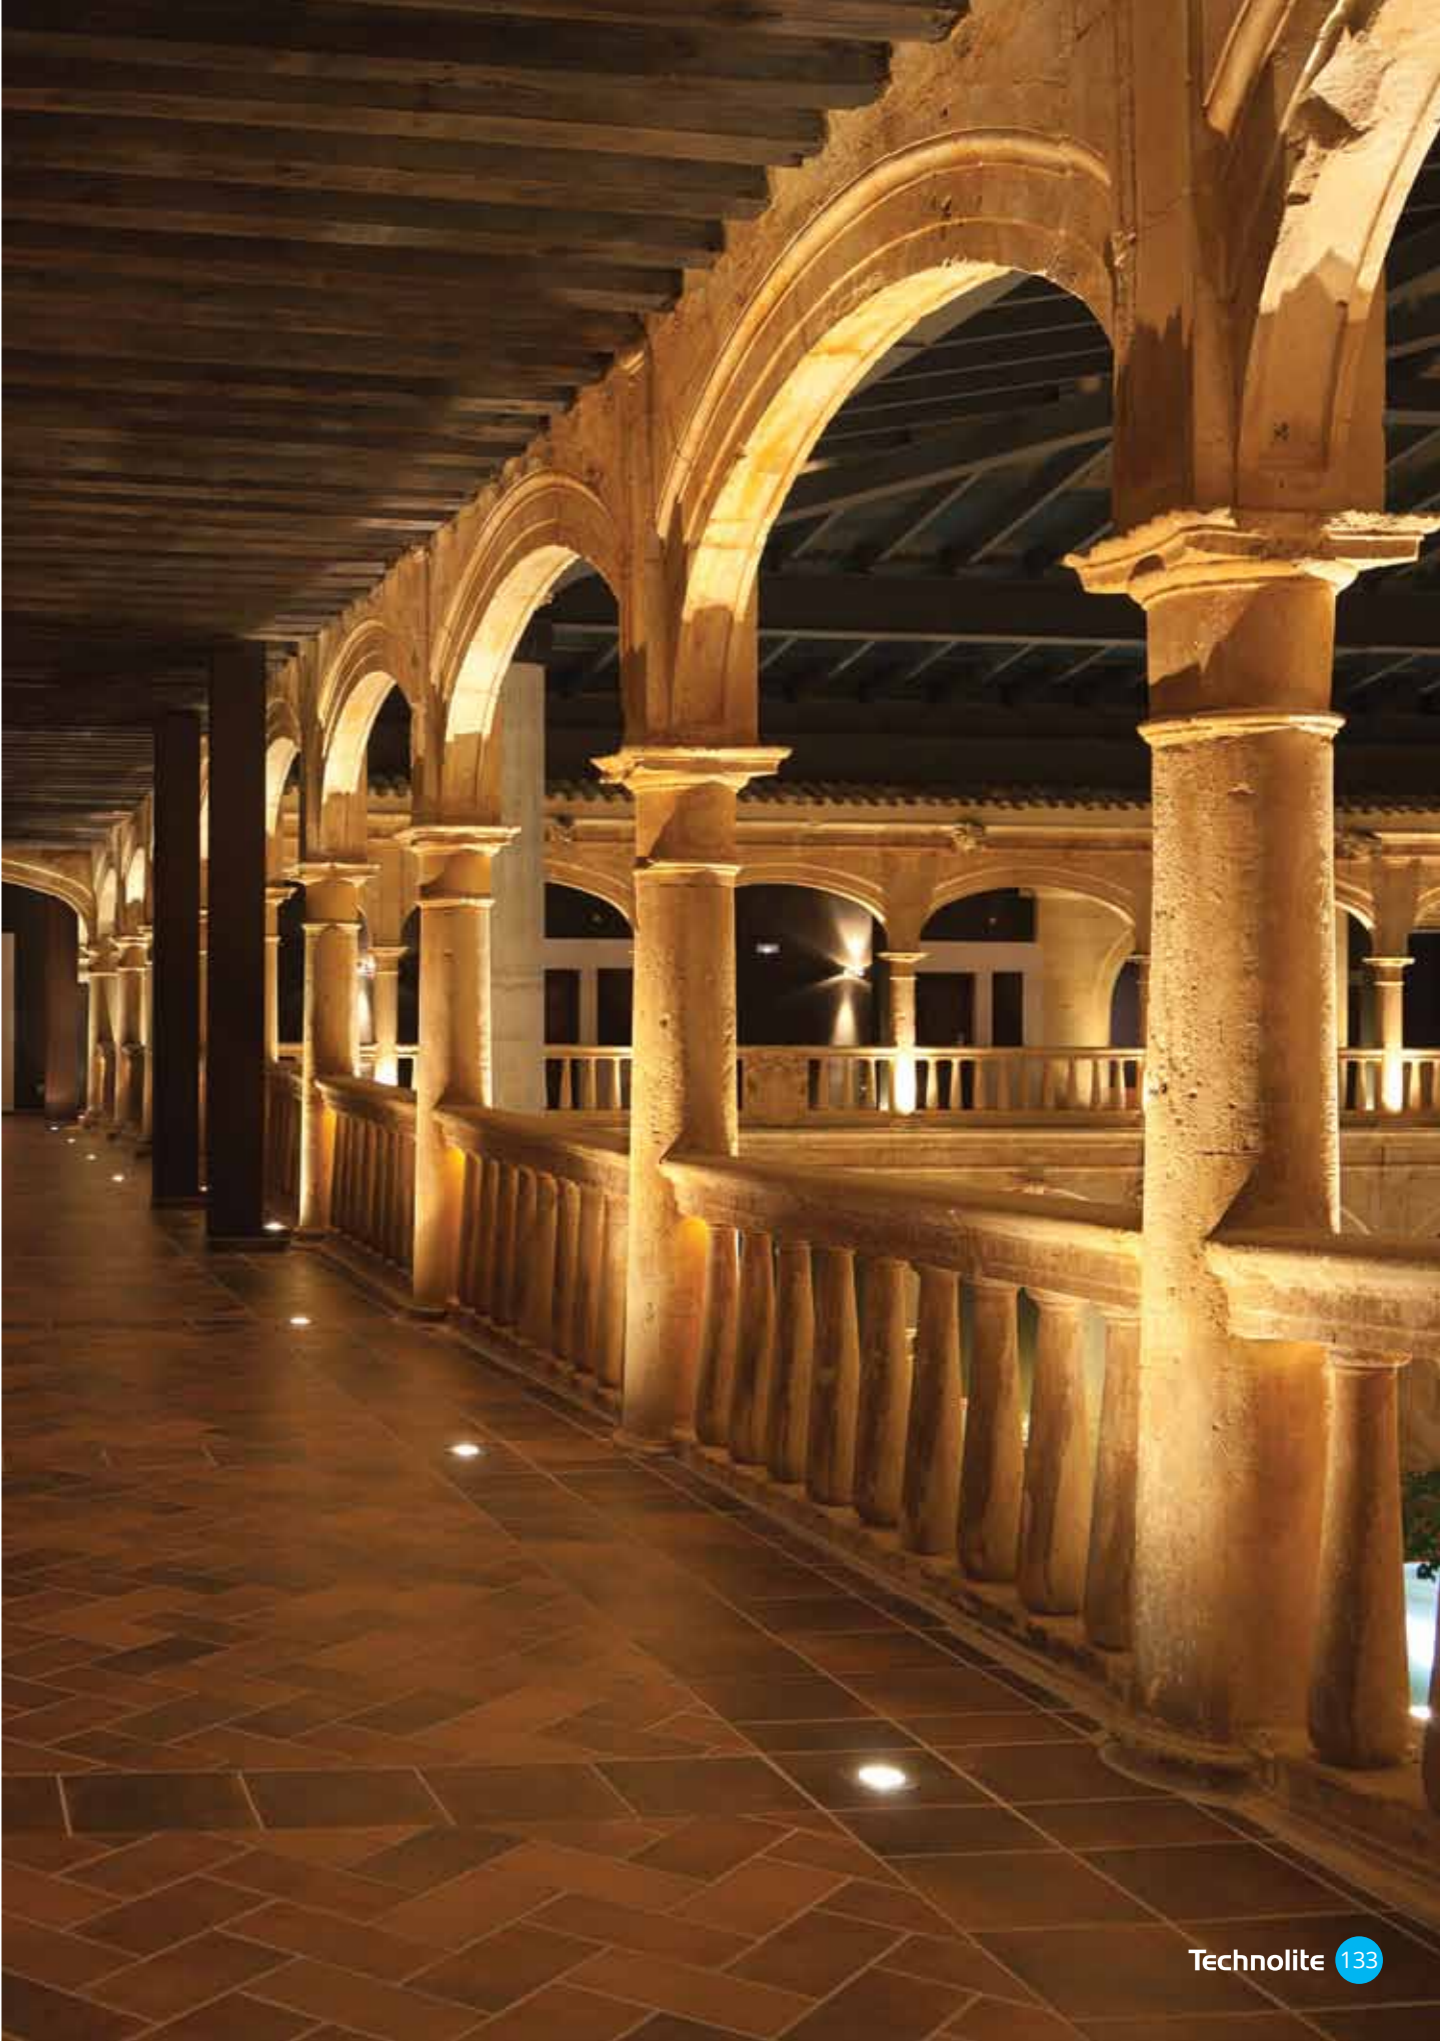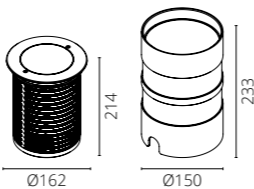

POP

POP brings a trimless face and finish to our inground family of luminaires. POP uses a CREE COB coupled with a built in HEP driver. The built in driver ensures no more fumbling around with transformers and complicated wiring and failed waterproofing. With a full glass face and an aluminium backing the POP lamps are built to last and stand up to even the harshest of elements. This lamp is the perfect in-ground lamp for gardens, decks, steps and pathways with a super clean and sleek look to go with it. Get rid of the trim, make your project pop.



POP7




Technical: 8W LED CREE | 657Lm (light source) 577Lm (Luminiare) | CRI 85 | 15°, 24°, 36° | 3000K-6000K | HEP Control Gear | 100-240V | IP67

Material: Aluminum+Glass

Color: White

Approvals: CE | RoHS

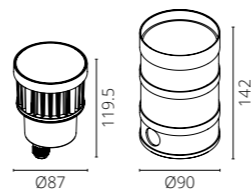

POP13




Technical: 16W LED CREE | 1083Lm (light source) 802Lm (Luminiare) | CRI 85 | 15°, 24°, 36° | 3000K-6000K | HEP Control Gear | 100-240V | IP67

Material: Aluminum+Glass

Color: White

Approvals: CE | RoHS

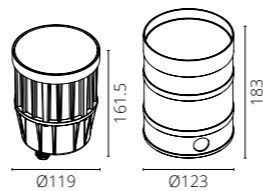

POP18




Technical: 22W LED CREE | 1822Lm (light source) 1487Lm (Luminiare) | CRI 85 | 15°, 24°, 36° | 3000K-6000K | HEP Control Gear | 100-277V | IP67

Material: Aluminum+Glass

Color: White

Approvals: CE | RoHS

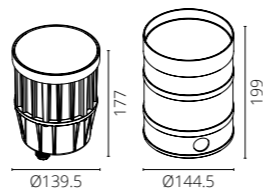

WE DESIGN,
CREATE AND
IMPROVE
LIGHTING PRODUCTS
TO INSPIRE BETTER
LIT SPACES AND NEW
POSSIBILITIES



Technolite Offices

1145-1153 Canton Road, Mongkok, Kowloon, Hong Kong.

Call: (852) 2739 4393 Fax: (852) 2739 8205

E mail: sales@technolite.co www.technolite.co